




YO-YO™ SERIES CONTINUOUS LEVEL INDICATOR

The Bindicator® Yo-Yo™ is a weight and cable bin level sensor specifically designed for continuous level measurement of dry bulk solids inventory. The Yo-Yo™ automates the use of a drop line for increased safety and accuracy. Available as an option, our Yo-Yo™ Readout is an LCD display that can monitor up to 99 sensors and is used to program each cable and weight Yo-Yo™, which includes assigning identification and measuring ranges.

Yo-Yo™

Weight and cable sensor specifically designed for managing dry bulk solids inventory.

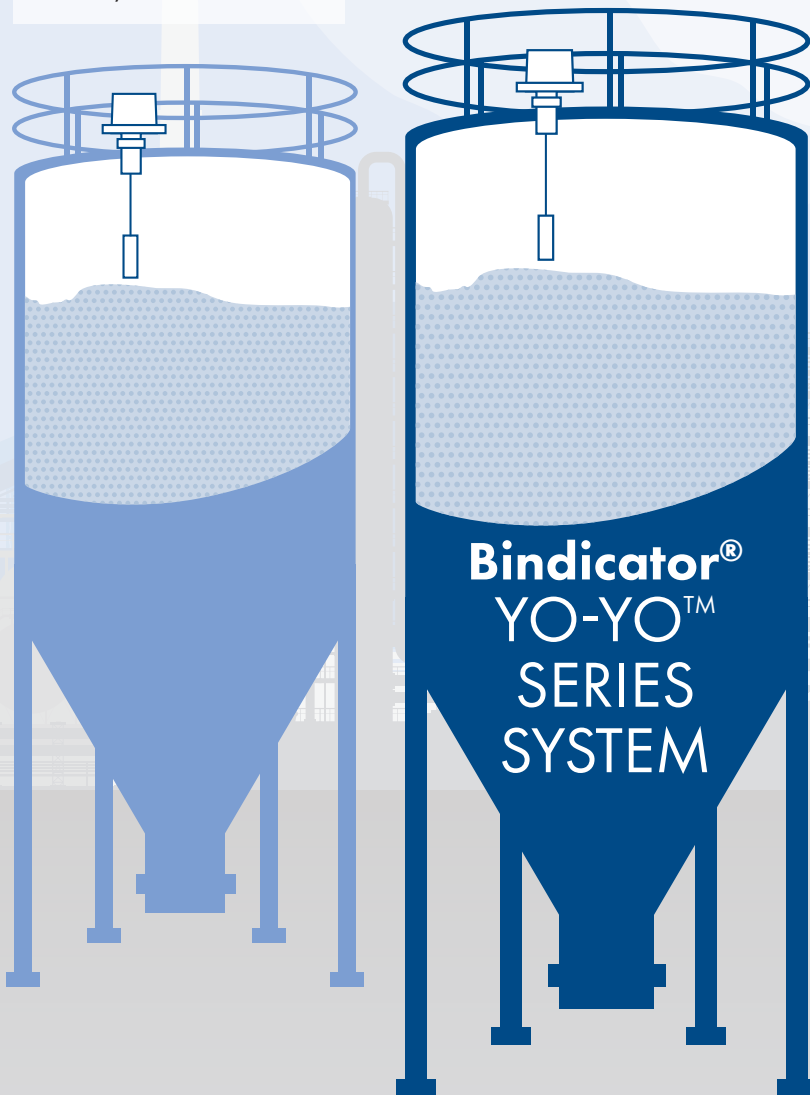

Display/Programmer

Clearly displays sensor measurements and information and allows for remote set-up and configuration.



Communications

The ORB™ connects the plant process instrumentation and the outside world to allow authorized users to monitor silo levels remotely via the Internet.



Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com

COMPLETE

Bindicator® offers a full line of level measurement devices and accessories to make monitoring material as efficient and easy as possible.

SIMPLE

Bindicator®, with a network of trained representatives in more than 40 countries worldwide, is committed to providing superior service and support to all of our customers.

RELIABLE

Bindicator® has been providing quality bin level indicators to the dry bulk industry since 1936. Our commitment to investment in R&D will continue the legacy of Bindicator reliability as new products continue to launch.

YO-YO™ SERIES FEATURES

Cable and weight continuous level sensors are simple measuring devices, but not all have been designed to provide accurate, reliable results, like the Bindicator Yo-Yo™. When looking for the best device for your application consider:



SIMPLE & INTUITIVE ADDRESSING

The set-up of a Yo-Yo™ device is as simple as the mechanism itself, and this includes the unit addressing. The Bindicator device's unique rotary selector

makes it easy to change in the field, with no cumbersome legend or chart required.



WEB-BASED OUTPUT DATA

The Yo-Yo™ cable and weight device can be fully integrated with the Bindicator ORB™ Inventory Management System

which can be used to monitor the device and even take a reading via the Internet.



FAST & CLEAR VISUAL READINGS

Configure a single sensor or a whole system with the Yo-Yo™ display programmer. Data should be easy to read on the display and provide the critical information to the user.



MULTIPLE CABLE OPTIONS

- Polyester Cable: Standard applications; plastics and aggregates
- Monofilament Cable: Liquid/solid interface
- Stainless Steel Cable: High temperature applications, harsh environments



YO-YO™ SENSORS

Bindicator offers two models of the Yo-Yo™ Sensor. The GP-4 is rated for General Purpose applications while the Mark-4 is ideal for Explosion-Proof applications.