

# SureSite® Visual Liquid Level Indicators

...the safe alternative to cloudy, breakable sight glasses.

**High Visibility**—Brilliantly colored flags are easy to read, even at great distances. The indicator is isolated from the measured media; therefore, SureSite Indicators can be used where sight glasses are not even a consideration.

**Durability**—Stainless steel, PVC, CPVC, PVDF, Hastelloy or other exotic housings, whatever the media requirements, provide years of maintenance-free service.

**Environmentally Safe**—Monitored liquid is contained inside a pressure-tight housing.

**Efficient**—Continuous level indication without external power.

**Electronic Control**—Attach optional point level switches and/or continuous level transmitters to extend capabilities beyond those of a simple sight glass.


- Low Maintenance—No glass to break, durable housings
- OSHA Friendly—Accident incidence reduction
- Reduced Workload—Quick and easy viewing shortens monitoring chores
- EPA Friendly—Fewer seals and no glass protect against spillage
- Multi-Purpose—Not single purpose as with sightglasses; can replace simple tank gauging systems as a complete level gauge package

When Gems Sensors & Controls introduced SureSite® Liquid Level Indicators almost 30 years ago, no one had seen anything like them... sightglasses were the standard in liquid level indication. Well, we are happy to say that since that time SureSite Indicators have retired more sightglasses than we can count! Our success has spawned many imitators, but there is still only one SureSite Indicator with its many exclusive features, and more importantly there is no manufacturer so uniquely capable as Gems to be your sensor supplier.

Fifty years of experience has taught us which technologies and product characteristics will provide the most effective solutions to your requirements. And our engineering resources have long been helping customers solve their most challenging application problems. So, there is a good chance we've already dealt with the design criteria you are working on. If you don't see materials or configurations in the following pages to suit your needs, please give Gems a call for custom application assistance.

## Gems Serves the OEM and End User

Gems welcomes any size order...whether a single unit or 100 units or more. Gems commitment is to meet your most stringent requirements of price, delivery and quality.

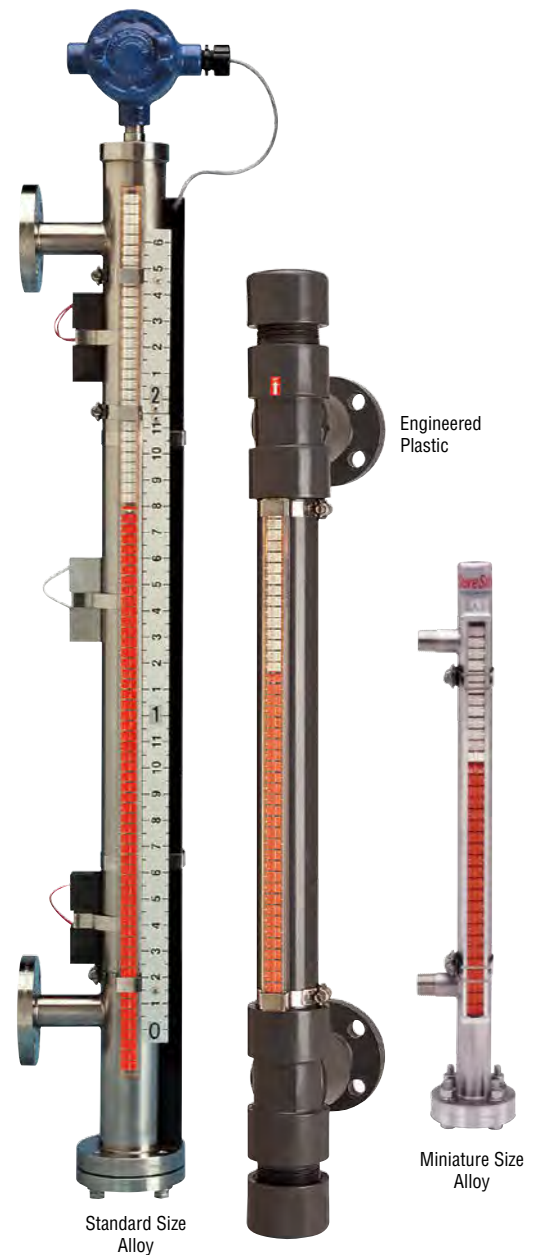


LEVEL INDICATORS - VISUAL

Contents	Page Start
Specifying and Ordering.....	D-3
Alloy Versions	
Miniature Size .....	D-4
Standard Size.....	D-7
High Performance SureSite.....	D-10
Engineered Plastic Version .....	D-13
Optional Transmitters.....	D-16
Optional Switch Modules.....	D-18
Optional Indicating Scale.....	D-18

## SureSite® Visual Liquid Level Indicators

Simply the Most Versatile Liquid Level Monitoring System Available ...  
and Tough Enough For All Kinds of Applications!


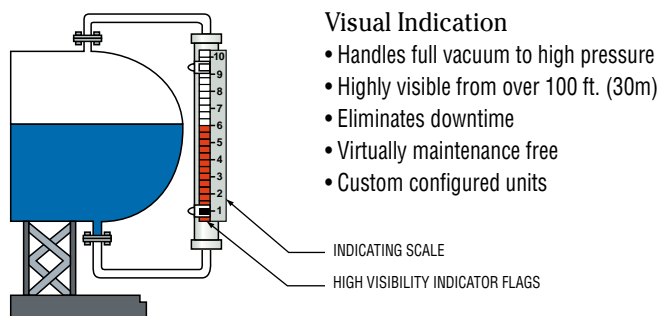


### Visual Indication

- Handles full vacuum to high pressure
- Highly visible from over 100 ft. (30m)
- Eliminates downtime
- Virtually maintenance free
- Custom configured units

### Comprehensive Indication

- Pressures to 4200 PSI
- Externally mounted electronics
- Hi/Low alarms, Switch Points
- ANSI Flange/ASME Type
- Cenelec, FM, UL, CSA Approved

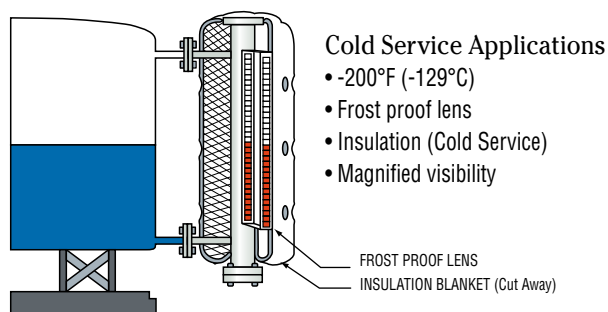
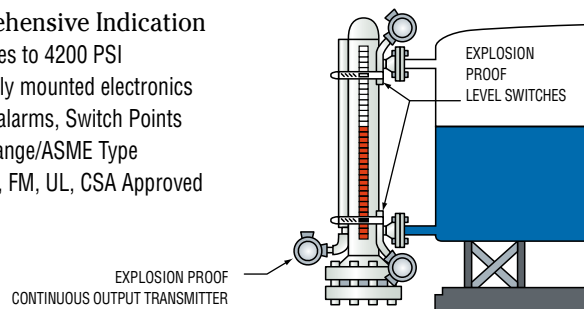


### Cold Service Applications

- -200°F (-129°C)
- Frost proof lens
- Insulation (Cold Service)
- Magnified visibility

### Hot Service Applications

- Process temps to 750°F (399°C)
- External electronics to 750°F (399°C)
- High temp insulation available

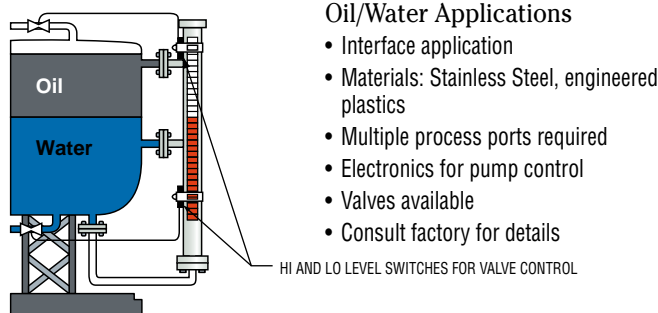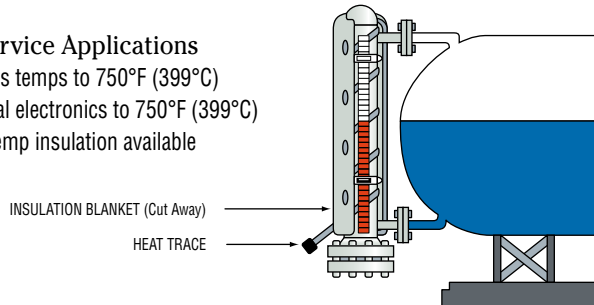


### Oil/Water Applications

- Interface application
- Materials: Stainless Steel, engineered plastics
- Multiple process ports required
- Electronics for pump control
- Valves available
- Consult factory for details

### Acid Applications

- Fluid compatible materials - Hastelloy C 276, PVDF, Alloy 20, Titanium
- Eliminate dangerous/costly leaks

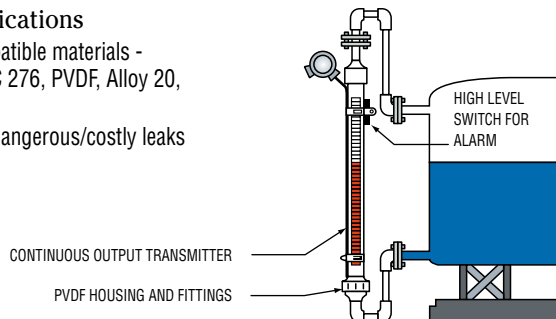

Top mount units available. Contact factory for details.

## Versatile Design

The SureSite Indicators described on the following pages represent only "basic designs." An infinite variety of configurations can be derived, custom built to your exact dimensions and application specifications on existing or new tank designs.




## SureSite Indicators Are Superior To Other Magnetic Type Indicators. Here's Why:


It begins with a patented Flag Assembly and integrated Magnetic Guide

Many magnetic flag type indicators look the same, but look closer and you'll see they are not made the same. SureSite® Indicators are unique. They incorporate a patented design and special features that provide the ultimate in performance and reliable operation.


Flag Channel Assembly (partial close-up)

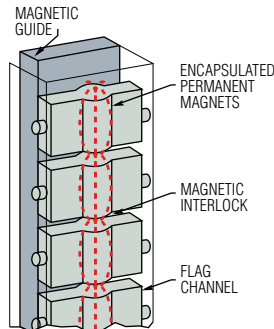

Profile View

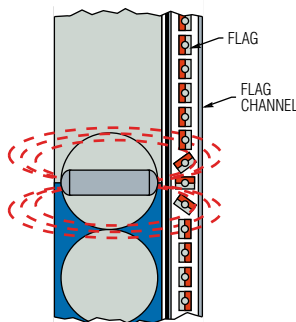

Top View

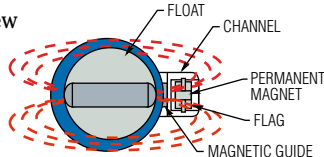

- A permanent magnet, encapsulated into each flag, forms a secure magnetic interlock with adjacent flags. Proper alignment is assured, and is unaffected by shock, vibration, surges or rapid level changes.
- A Magnetic Guide (a SureSite exclusive) enables the use of a more powerful bar magnet in the float assembly. The guide is integrated into the flag channel, so regardless of positioning, the bar magnet within the float is always aligned for optimum performance and exactness.
- A powerful, permanent bar magnet lies in a horizontal position within the float. This preferred attitude directs the flux density of the magnetic field toward the flags. Flag rotation is positive and reliable.
- Float capability to handle liquid specific gravity range as low as 0.40.

## SureSite® Indicators in the Process...

Many applications require high temperature/pressure capabilities, or strict adherence to industry standards such as

- ASME
- CENELEC
- CSA
- FM
- UL

Gems High Performance



SureSite Indicators are manufactured to fill these requirements.

See pages D-10 and D-11.



## Operating Principle

As liquid level rises, a magnet-equipped float within the unit inverts the magnetic flags in the external indicator to "color-side-out." The flags remain magnetically interlocked in a column until again inverted to "contrasting-side-out" by the float as liquid level falls. Liquid level is indicated by the junction of the "color" and "contrasting" portions of the column.

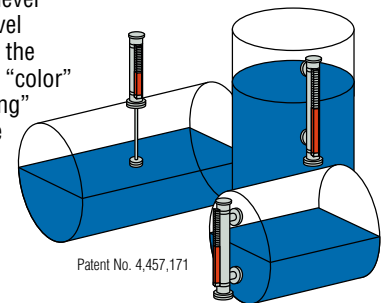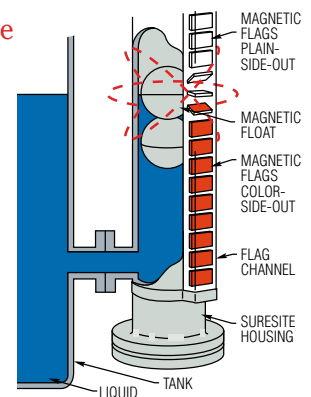

Patent No. 4,457,171

## Ordering SureSite® Indicators

Order online or use our quick and easy OrderIt! Forms.

1. To specify this product, start by photocopying the appropriate OrderIt! PRODUCT CHECK LIST located on pages D-6, D-9, D-12, and D-15.
2. Next, using the product information supplied in this section, check off the boxes and fill in the blanks of the OrderIt! Check List to specify your desired product configuration. Accurate answers to each question will assure correct fit and function of your custom built product. Note: Use a separate Check List for each unique configuration.
3. To obtain a priced quotation, fax your completed OrderIt! Check List to Gems at **860-747-4244** or fax it to the Sales Partner nearest you. You can now configure and request quotes directly online at [www.gemssensors.com](http://www.gemssensors.com). All of our Sales Partner locations, along with their fax numbers, are conveniently located on the Web at [www.gemssensors.com](http://www.gemssensors.com).
4. To order your CUSTOM product, either place your order over the phone with one of our representatives, or use the OrderIt! method. Just photocopy the appropriate OrderIt! PRODUCT CHECK LIST (D-6, D-9, D-12, and/or D-15). Accurately complete all of the purchasing information that we'll need to process your order and fax it. These forms will provide us with the shipping and billing information we need, along with any prices or delivery dates quoted.

## Alloy Versions—Miniature Size





- ▶ Lengths to over 20 feet (6.1 meters)
- ▶ 316 Stainless Steel construction
- ▶ Pressures to 400 PSI (27 bar) – Temperature to 400°F (204°C)

Use these Mini SureSite Indicators where space is tight—they feature a diameter of only 1-1/4"! They can replace existing, antiquated sightglasses for excellent external, visual liquid level indication. Mini SureSite Indicators are ideal for use with clean, low viscosity liquids.

### Typical Applications

- Pharmaceuticals • Medical Equipment • Food and Beverages
- Semiconductor Manufacturing • Boilers

### 1. Mounting Configuration Types

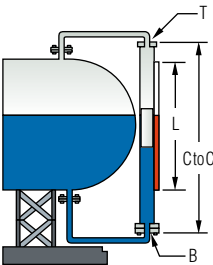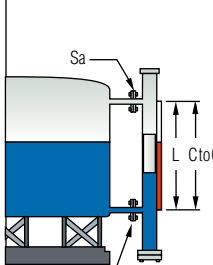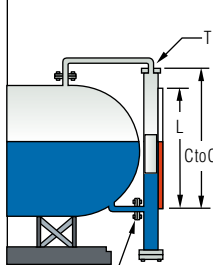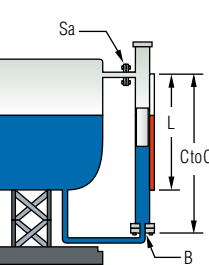
	Type AM	Type BM	Type CM	Type DM
	Top and Bottom Process Connections	Side and Side Process Connections	Top and Side Process Connections	Side and Bottom Process Connections
				
L = Length of Visual Indication				
Typical Lengths*	C to C = L + 7.72" (196 mm)	C to C = L	C to C = L + 3" (76 mm)	C to C = L + 5" (127 mm)
Flag Material	Plastic (300°F/148.9°C) or Aluminum (400°F/204°C)			
Length of Indication (Uninterrupted)	240" (610 cm)			

\*Dimensions vary due to connections, material and specific gravity.

Note: Additional materials, floats, connections and manufacturing techniques are available to extend lengths and operational capabilities. Please contact Gems if the parameters above do not meet your requirements.

### Miniature SureSite Performance

Gems configures Miniature SureSite Indicators, using various materials and fittings, to perform within the Pressure/Temperature parameters specified in the chart at right. Consult the factory with pressure/temperature requirements that fall outside the parameters shown here.

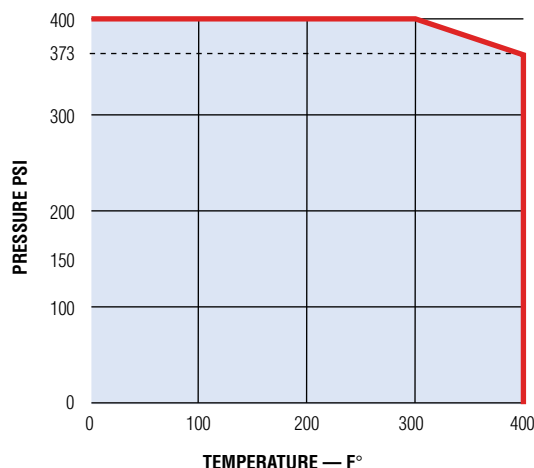

Note: SureSite Indicators are available for temperatures as low as -200°F (-129°C)





**ORDER IT!**

Ordering is Easy! See Page D-6.  
Easy online ordering too!



## 2. Connection Codes

(See complete descriptions below)

		Blind		NPT				Flange		Weld	
				Fixed		Removable					
		Fixed	Removable	Female	Male	Female	Male	Fixed	Removable	Socket Butt	Removable Butt
TOP  T	<b>Standard Connections</b>	T1	T10	T2	T3	T11	T12	T19	T20	T18	T13
	<b>Sanitary Connections</b>							T7	T8		
SIDE  Sa											
SIDE  Sb											
BOTTOM  B	<b>Standard Connections</b>	B1	B10	B2	B3	B11	B12	B19	B20	B18	B13
	<b>Sanitary Connections</b>							B7	B8		

— Connection Codes and Materials background-shaded in this color are stocked by Gems. Select these connections where possible to obtain the most economical SureSite Indicators with a prompt 3-day delivery.

Note: Gems recommends a removable top and/or bottom connection for float access.

### Connection Code Descriptions

Please provide all connections when completing the Order! Product Check List (located on the following page).

**Note:** Before selecting your connections, consider incorporating your vent and drain requirements.

#### T & B (Top and Bottom)

- |   |                     |
|---|---------------------|
| T/B 1. Welded cap   | Sa & Sb (Sides)     |
| T/B 2. Welded cap with FNPT   | S1. No connection   |
| T/B 3. Welded cap with MNPT   | S2. MNPT nipple     |
| T/B 7. Sanitary flange  | S3. FNPT coupling   |
| T/B 8. Sanitary flange with mating blind flange                             | S4. ANSI flange     |
| T/B 10. Standard fixed flange/mating blind flange                           | S5. Sanitary flange |
| T/B 11. Standard fixed flange/mating FNPT reducing flange                   | S6. Buttweld nipple |
| T/B 12. Standard fixed flange/mating flange with MNPT nipple                |                     |
| T/B 13. Standard fixed flange/mating flange with butt weld nipple           |                     |
| T/B 18. Welded cap with butt weld nipple                                    |                     |
| T/B 19. Welded cap with ANSI flange   |                     |
| T/B 20. Standard fixed flange/mating reducing flange spool with ANSI flange |                     |

### Performance Notes:

- As an option **either** the Switch Modules or Transmitter can be used on a Miniature SureSite Indicator - **Not Both**.
- Minimum specific gravity is 0.7.
- Standard O-ring seal material is Viton®. Others available upon request.
- Electropolished Outer Diameter (OD) and/or Inner Diameter (ID) housings available upon request.



Need it quick? Choose materials and components with the color shading for 3-Day manufacturing and shipping. See the Product Configurator section at [www.gemssensors.com](http://www.gemssensors.com) for further details.

### Accessories – Pages D-16 to D-18

Make more of your SureSite® Indicator with the productivity-enhancing accessories found at the end of this section.

- Indicating Scales**  
Add graduations to your flag indication.
- Switch Modules**  
Control pumps, valves, alarms, etc. Mount externally on housing for infinite positioning.
- Continuous Output Transmitters**  
Signal conditioned for compatibility with most electronic instruments to 300°F (149°C).



<h2 style="margin: 0;">267-673-8118</h2> <h3 style="margin: 0;">Photocopy This Form</h3> <p style="margin: 0;">Use one form for each product type you are selecting.</p> <p style="margin: 0; font-size: small;">This form may also be completed online at <a href="http://gemssensors.com">gemssensors.com</a> for RFQ.</p>	<p>This is a <input type="checkbox"/> Request for a Quote <span style="float: right;">Name _____</span></p> <p style="padding-left: 100px;"><input type="checkbox"/> Order P.O.# _____ <span style="float: right;">Company _____</span></p> <p>Quantity Needed _____ <span style="float: right;">Street _____</span></p> <p>Date Required ____/____/____ <span style="float: right;">City _____ State ____ Zip _____</span></p> <p>Shipping Method: _____ <span style="float: right;">Phone ( ____ ) _____</span></p> <p>Partials Accepted: <input type="checkbox"/> Yes <span style="float: right;">Fax ( ____ ) _____</span></p> <p style="padding-left: 100px;"><input type="checkbox"/> No</p>
--	--

## SureSite Indicators, Alloy Versions – Miniature Size

### Process Conditions

This information is essential to the accurate and proper operation of your SureSite® Visual Level Indicators. Please complete fully and accurately.

- |   |  |
|---|--|
| <p><b>1. Pressure:</b> Operating _____ psig Maximum _____ psig</p> <p><b>2. Temperature:</b> Operating _____ °F Maximum _____ °F</p> <p><b>3. Liquid Media:</b> _____</p> | <p><b>4. Specific Gravity @ Operating Condition:</b> _____</p> <p><b>5. Viscosity:</b> _____ SSU</p> <p><b>6. Application Location:</b> <input type="checkbox"/> Indoors <input type="checkbox"/> Outdoors</p> |
|---|--|

### Physical Configuration

#### 1. Mounting Configuration Types:

- ☐ Type AM    ☐ Type BM    ☐ Type CM    ☐ Type DM

#### 2. Connection Codes – Complete all 4 connection code lines. Check off NPT or Flange size where appropriate.

▼ Connection Code Number Goes Here. **Connection Code Numbers and their descriptions are on Page D-5.**

Top T	NPT or Weld	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____
Side Sa	NPT or Weld	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____
Side Sb	NPT or Weld	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____
Bottom B	NPT or Weld	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____

#### 3. Length of Visual Indication – L: \_\_\_\_\_ inches (240", Max.).

Connection to Connection Dimension – C to C: \_\_\_\_\_ inches.

#### 4. Flag Type

Plastic flags available to 300°F (149°C).

Aluminum flags only for temperatures to 750°F (399°C).

- ☐ Plastic (Orange and White)    ☐ Aluminum (Black and Silver)
- ☐ Non-Standard; Specify: \_\_\_\_\_, consult factory.

#### 5. O-Ring Material:

- ☐ Viton® (Standard)    ☐ Ethylene Propylene
- ☐ Other \_\_\_\_\_

#### Special Instructions (Materials, Connections, etc.)

\_\_\_\_\_

\_\_\_\_\_

### Accessories (Pages D-16 to D-18)

- 1. Switch Modules (Single Point):** \_\_\_\_\_ Quantity
- a. ☐ SPST   ☐ SPDT   ☐ DPDT 120 VAC   ☐ DPDT 24 VDC
- b. ☐ Standard – 300°F    ☐ High Temperature
- ☐ Explosion Proof

**2. Indicating Scales:**

- ☐ Feet and Inches   ☐ Inches   ☐ Metric   ☐ Blank
- ☐ Custom Graduations; specify: \_\_\_\_\_

**3. Continuous Transmitter:**

- Output: ☐ 0-5 VDC   ☐ 0-12 VDC   ☐ 4-20 mA
- J-Box: ☐ Standard   ☐ Explosion Proof

Please contact C A BRIGGS COMPANY for any configuration or special requirements not covered on this form. **267-673-8117**

Quote \$ \_\_\_\_\_ Date Quoted \_\_\_\_/\_\_\_\_/\_\_\_\_



**ORDER IT!**

Ordering is Easy! See Page D-9.  
Easy online ordering too!





## Standard Alloy Versions – Standard Size

- ▶ Temperatures to 750°F (399°C)
- ▶ Pressures to 700 PSI (48 bar)

Rugged, welded construction makes these 2-1/2" (63.5 mm) diameter design, alloy SureSite Indicators dependable over a long service life indoors and out.

### 1. Mounting Configuration Types

To choose the best configuration for your application, focus on the process connections (connections where the liquid typically enters/leaves the SureSite).

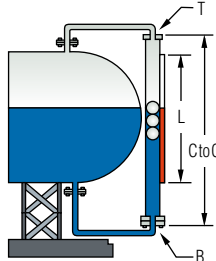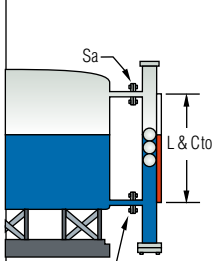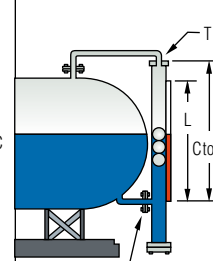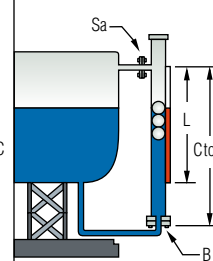
	Type AA Top and Bottom Process Connections	Type BA Side and Side Process Connections	Type CA Top and Side Process Connections	Type DA Side and Bottom Process Connections
				
<b>Typical Lengths*</b>	C to C = L + 10-1/4" (260.4 mm)	C to C = L	C to C = L + 3-3/4" (95.2 mm)	C to C = L + 6-1/2" (165.1 mm)
<b>Flag Material</b>	Plastic (300°F/148.9°C) or Aluminum (750°F/399°C)			
<b>Length of Indication (Uninterrupted)</b>	240" (610 cm)			
<b>Minimum Specific Gravity</b>	0.39			

\* Dimensions vary due to connections, material and specific gravity.

Note: Additional materials, floats, connections and manufacturing techniques are available to extend lengths and operational capabilities. Please contact GEMS Sensors if the parameters above do not meet your requirements.


### 2. Material

Housing and Float: 316 Stainless Steel  
Pressure/Temperature performance parameters for alloy SureSite versions are specified in the chart at right.  
Please consult the factory with temperature/pressure requirements that fall outside the parameters shown here.

 = Stock Material (Best economy and delivery).

Materials		Code
Housing	Float	
316L Stainless Steel	316L Stainless Steel	2
Carpenter 20	Hastelloy C276	3*
Hastelloy C276	Hastelloy C276	4*

\* Consult factory for pressure/temperature capabilities.

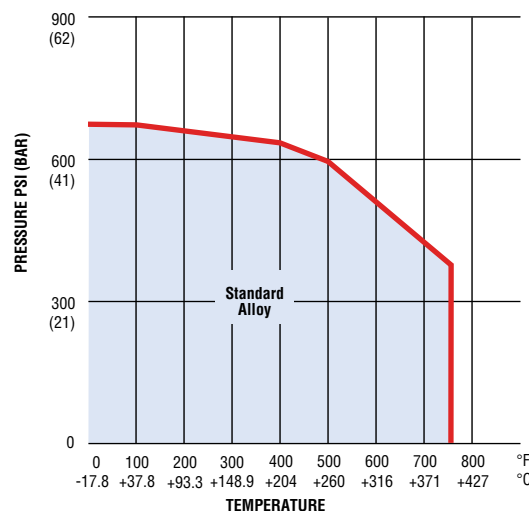

Note: SureSite Indicators are available for temperatures as low as -200°F (-129°C).



Type BA Shown

LEVEL INDICATORS – VISUAL





**FAX IT!**  
**267-673-8118**  
**Photocopy This Form**  
 Use one form for each product type you are selecting.  
 This form may also be completed online at [gemssensors.com](http://gemssensors.com) for RFQ.

This is a ☐ Request for a Quote ☐ Order P.O.# \_\_\_\_\_

Name \_\_\_\_\_

Quantity Needed \_\_\_\_\_ Company \_\_\_\_\_

Date Required \_\_\_\_/\_\_\_\_/\_\_\_\_ Street \_\_\_\_\_

Shipping Method: \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_ Zip \_\_\_\_\_

Phone (\_\_\_\_) \_\_\_\_\_

Partials Accepted: ☐ Yes Fax (\_\_\_\_) \_\_\_\_\_

☐ No

## SureSite Indicators, Alloy Versions – Standard Size

### Process Conditions

This information is essential to the accurate and proper operation of your SureSite® Visual Level Indicators. Please complete fully and accurately.

- Pressure:** Operating \_\_\_\_\_ psig Maximum \_\_\_\_\_ psig
- Temperature:** Operating \_\_\_\_\_ °F Maximum \_\_\_\_\_ °F
- Liquid Media:** \_\_\_\_\_
- Specific Gravity @ Operating Condition:** \_\_\_\_\_
- Viscosity:** \_\_\_\_\_ SSU
- Application Location:** ☐ Indoors ☐ Outdoors

### Physical Configuration

#### 1. Mounting Configuration Types:

☐ Type AA ☐ Type BA ☐ Type CA ☐ Type DA

#### 2. Housing and Float Material

☐ Code 2 ☐ Code 3 ☐ Code 4

#### 3. Connection Codes – Complete all 4 connection code lines. Check off NPT or Flange size where appropriate.

▼ Connection Code Number Goes Here. **Connection Code Numbers and their descriptions are on Page D-8.**

Top T	NPT	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF) <input type="checkbox"/> 600# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____
Side Sa	NPT	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF) <input type="checkbox"/> 600# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____
Side Sb	NPT	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF) <input type="checkbox"/> 600# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____
Bottom B	NPT	Flange
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF) <input type="checkbox"/> 600# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____

- Length of Visual Indication – L:** \_\_\_\_\_ inches (240", Max.).  
 Connection to Connection Dimension – C to C: \_\_\_\_\_ inches.

#### Special Instructions (Materials, Connections, etc.)

#### 5. Flag Type

Plastic flags available to 300°F (149°C).

Aluminum flags only for temperatures to 750°F (399°C).

- ☐ Plastic (Orange and White) ☐ Aluminum (Black and Silver)
- ☐ Non-Standard; Specify: \_\_\_\_\_ consult factory.

### Accessories (Pages D-16 to D-18)

#### 1. Transmitters (Continuous Electrical Indication):

- ☐ Low Temperature – 300°F (149°C) ☐ Explosion-Proof
- ☐ High Temperature – 750°F (399°C)

#### 2. J-Box/Signal Conditioners Accessories:

- ☐ Terminal Strip ☐ 4-20 mA Output
- ☐ 0-12 VDC Output ☐ 0-5 VDC Output

#### 3. Power Supply:

- ☐ 115 VAC (Input) /24 VDC (Output)

- (Optional) ☐ 230 VAC (Input) /24 VDC (Output)

#### 4. Switch Modules (Single Point): \_\_\_\_\_ Quantity (only if required)

- a. ☐ SPST ☐ SPDT ☐ DPDT 120 VAC ☐ DPDT 24 VDC
- b. ☐ Standard – 300°F (149°C) ☐ Explosion Proof
- ☐ High Temperature – 750°F (399°C)

#### 5. Indicating Scales:

- ☐ Feet and Inches ☐ Inches ☐ Metric ☐ Blank

- ☐ Custom Graduations; specify: \_\_\_\_\_

Please Contact **C A Briggs Company** for any Special Configuration  
 Or requirements not covered on this form. **267-673-8117**



Quote: \$ \_\_\_\_\_ Date Quoted: \_\_\_\_/\_\_\_\_/\_\_\_\_

Standard SureSite / p3of3 / 3-APR-14

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974  
 Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: [Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

## High Performance Versions – Standard Size

- ▶ Designed to meet the requirements of ASME B31.3 "normal" fluid service\*
- ▶ Temperatures to 750°F (399°C)
- ▶ Pressures to 4200 PSI (290 bar)

For your most demanding applications, these SureSite® Indicators feature ANSI flanges and fittings and construction to rigorous ASME standards. You can't specify a better visual level indicator.

### 1. Mounting Configuration Types

To choose the best configuration for your application, focus on the process connections (connections where the liquid typically enters/leaves the SureSite).

	Type AA Top and Bottom Process Connections	Type BA Side and Side Process Connections	Type CA Top and Side Process Connections	Type DA Side and Bottom Process Connections
<b>Typical Lengths†</b>	C to C = L + 10-1/4" (260.4 mm)	C to C = L	C to C = L + 3-3/4" (95.2 mm)	C to C = L + 6-1/2" (165.1 mm)
<b>Flag Material</b>	Plastic (300°F/148.9°C) or Aluminum (750°F/399°C)			
<b>Length of Indication (Uninterrupted)</b>	240" (610 cm)			
<b>Minimum Specific Gravity</b>	0.39			

† Dimensions vary due to connections, material and specific gravity.

### 2. Material

Select desired material from those tabulated below. Mark the Code Number on your Order! Check List. The pressure/temperature performance parameters are specified in the chart at right. Consult the factory with pressure/temperature requirements that fall outside the parameters shown here. These units are manufactured in Schedule 40, 80 or 160 pipe accordingly.

= Stock Material (Best economy and delivery).


Materials		Code
Housing	Float	
316L Stainless Steel	316L Stainless Steel 600 psi –	<b>2</b>
316L Stainless Steel	Titanium (Ti-6Al-4V) 600 psi+	<b>9</b>

Note: Additional materials, floats, connections and manufacturing techniques are available to extend lengths and operational capabilities. Please contact Gems if the parameters above do not meet your requirements.

\*Units requiring ASME certification must be specified at time of request.





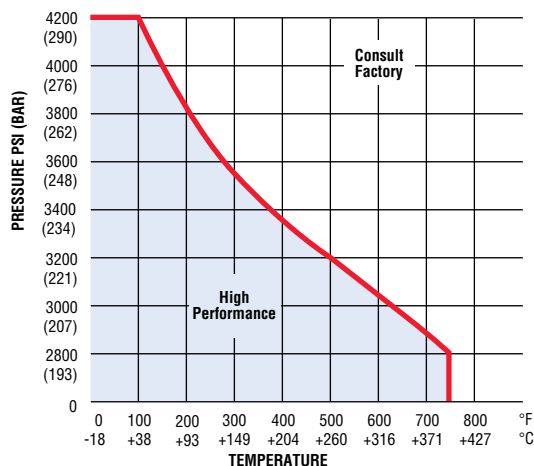

**ORDER IT!**

Ordering is Easy! See Page D-12.  
Easy online ordering too!



### 3. Connection Codes

**All connections comprised of ANSI fittings** (See complete descriptions below)

	All connections comprised of ANSI fittings											
	Blind		NPT				Flange		Weld			
			Fixed		Removable				Fixed		Removable	
	Fixed	Removable	Female	Male	Female	Male	Fixed	Removable	Socket	Butt	Socket	Butt
<b>TOP</b>  <b>T</b>	T15	T16	T17	T19	T20	T22	T23	T24	T25	T26	T27	T28
		T29			T30	T32		T33			T34	T35
<b>SIDE</b>  <b>Sa</b>												
												
<b>SIDE</b>  <b>Sb</b>												
												
<b>BOTTOM</b>  <b>B</b>												

— Connection Codes and Materials background-shaded in this color are readily available from Gems. Select these connections where possible to obtain the most economical SureSite Indicators.

Note: Gems recommends a removable top and/or bottom connection for float access.

#### Connection Code Descriptions

Please provide all connections when completing the OrderIt! Product Check List.

**Note:** Before selecting your connections, consider incorporating your vent and drain requirements.

#### T & B (Top and Bottom)

- T/B 15. ANSI welded pipe cap
- T/B 16. ANSI fixed slip-on flange/blind mating flange
- T/B 17. ANSI welded pipe cap with FNPT
- T/B 19. ANSI welded pipe cap with MNPT nipple
- T/B 20. ANSI fixed slip-on flange/mating FNPT reducing flange
- T/B 22. ANSI fixed slip-on flange/mating flange w/MNPT nipple
- T/B 23. ANSI welded pipe cap with ANSI flange
- T/B 24. ANSI fixed slip-on flange/mating reducing ANSI flange spool
- T/B 25. ANSI welded pipe cap with socketweld coupling
- T/B 26. ANSI welded pipe cap with butt weld nipple
- T/B 27. ANSI fixed slip-on flange/mating flange with socketweld coupling
- T/B 28. ANSI fixed slip-on flange/mating flange with butt weld nipple
- T/B 29. ANSI fixed weldneck flange/blind mating flange
- T/B 30. ANSI fixed weldneck flange/mating FNPT reducing flange
- T/B 32. ANSI fixed weldneck flange/mating flange w/MNPT nipple
- T/B 33. ANSI fixed weldneck flange/mating reducing flange spool
- T/B 34. ANSI fixed weldneck flange/mating flange with socketweld coupling
- T/B 35. ANSI fixed weldneck flange/mating flange with butt weld nipple

#### Sa & Sb (Sides)

- S1. No connection
- S2. MNPT nipple
- S3. FNPT coupling
- S4. ANSI flange
- S5. Weldneck flange
- S6. Socketweld coupling
- S7. Butt weld nipple

### Accessories – Pages D-16 to D-18

Make more of your SureSite® Indicator with the productivity-enhancing accessories found at the end of this section.

- **Indicating Scales**  
Add graduations to your flag indication.
- **Switch Modules**  
Control pumps, valves, alarms, etc. Mount externally on housing for infinite positioning.
- **Continuous Output Transmitters**  
Signal conditioned for compatibility with most electronic instruments to 300°F (149°C).

**FAX IT!**

267-673-8118

**Photocopy This Form**

Use one form for each product type you are selecting.

This is a ☐ Request for a Quote☐ Order P.O.# \_\_\_\_\_

Quantity Needed \_\_\_\_\_

Date Required \_\_\_\_/\_\_\_\_/\_\_\_\_

Shipping Method: \_\_\_\_\_

Partials Accepted: ☐ Yes☐ No

Name \_\_\_\_\_

Company \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_ Zip \_\_\_\_\_

Phone (\_\_\_\_) \_\_\_\_\_

Fax (\_\_\_\_) \_\_\_\_\_

**SureSite Indicators, High Performance Versions****Process Conditions**

This information is essential to the accurate and proper operation of your SureSite® Visual Level Indicators. Please complete fully and accurately.

1. **Pressure:** Operating \_\_\_\_\_ psig Maximum \_\_\_\_\_ psig2. **Temperature:** Operating \_\_\_\_\_ °F Maximum \_\_\_\_\_ °F3. **Liquid Media:** \_\_\_\_\_**Use this page for high performance units only.**4. **Specific Gravity @ Operating Condition:** \_\_\_\_\_5. **Viscosity:** \_\_\_\_\_ SSU6. **Application Location:** ☐ Indoors ☐ Outdoors**Physical Configuration****1. Mounting Configuration Types:**☐ Type AA ☐ Type BA ☐ Type CA ☐ Type DA**2. Housing and Float Material –** Housing: 316L/SS☐ Code 2 – 316L SS Float ☐ Code 9 – Titanium Float**3. Connection Codes – Complete all 4 connection code lines.** Check off NPT or Flange size where appropriate.▼ Connection Code Number Goes Here. **Connection Code Numbers and their descriptions are on Page D-11.**

Top <b>T</b>	NPT or Weld	Flange		
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 1.5"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF)	<input type="checkbox"/> 600# (RF)	<input type="checkbox"/> 900# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____		
Side <b>Sa</b>	NPT or Weld	Flange		
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 1.5"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF)	<input type="checkbox"/> 600# (RF)	<input type="checkbox"/> 900# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____		
Side <b>Sb</b>	NPT or Weld	Flange		
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 1.5"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF)	<input type="checkbox"/> 600# (RF)	<input type="checkbox"/> 900# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____		
Bottom <b>B</b>	NPT or Weld	Flange		
<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 1.5"	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2"	<input type="checkbox"/> 150# (RF)	<input type="checkbox"/> 600# (RF)	<input type="checkbox"/> 900# (RF)
<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____	<input type="checkbox"/> Other _____		

4. **Length of Visual Indication – L:** \_\_\_\_\_ inches (240", Max.).

Connection to Connection Dimension – C to C: \_\_\_\_\_ inches.

**5. Flag Type**

Plastic flags available to 300°F (149°C). Specify aluminum flags for temperatures of 301°F to 750°F (149°C to 399°C).

☐ Plastic (Orange and White) ☐ Aluminum (Black and Silver)☐ Non-Standard; Specify: \_\_\_\_\_ consult factory.**6. ☐ ASME Certification Required****Special Instructions** (Materials, Connections, etc.)

---



---



---

**Accessories (Pages D-16 to D-18)****1. Transmitters** (Continuous Electrical Indication):☐ Low Temperature – 300°F (149°C) ☐ Explosion-Proof  
☐ High Temperature – 750°F (399°C)**2. J-Box/Signal Conditioners Accessories:**☐ Terminal Strip ☐ 4-20 mA Output  
☐ 0-12 VDC Output ☐ 0-5 VDC Output**3. Power Supply:** ☐ 115 VAC (Input) /24 VDC (Output)  
(Optional) ☐ 230 VAC (Input) /24 VDC (Output)**4. Switch Modules** (Single Point): \_\_\_\_\_ Quantity (only if required)a. ☐ SPST ☐ SPDT ☐ DPDT 120 VAC ☐ DPDT 24 VDCb. ☐ Standard – 300°F (149°C) ☐ Explosion Proof☐ High Temperature – 750°F (399°C)**5. Indicating Scales:**☐ Feet and Inches ☐ Inches ☐ Metric ☐ Blank☐ Custom Graduations; specify: \_\_\_\_\_Please Contact **C A Briggs Company** for any Special Configurations  
Or requirements not covered on this form. **267-673-8117**

**Gems**  
Sensors & Controls

Quote: \$ \_\_\_\_\_ Date Quoted: \_\_\_\_/\_\_\_\_/\_\_\_\_

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: [Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

Hi Perf SureSite / p3of3 / 19-MAY-16

**ORDER IT!**

Ordering is Easy! See Page D-15.  
Easy online ordering too!

## Engineered Plastics Versions – Standard Size

- ▶ Temperatures to 280°F (139°C)
- ▶ Pressures to 150 PSI (10.3 Bar)
- ▶ Up to 19 feet (5.8 meters) of continuous visual indication

The 2" Schedule 80 pipe design is ideal for use on chemical storage tanks, or with almost any liquid where temperature and pressure requirements are moderate. All SureSite Indicators feature the same patented flag and guide assemblies used on our alloy versions, so you can be assured of excellent visibility and long-life reliability.

### 1. Mounting Configuration Types

To choose the best configuration for your application, focus on the process connections (connections where the liquid typically enters/leaves the SureSite).

	Type AP Top and Bottom Process Connections	Type BP Side and Side Process Connections	Type CP Top and Side Process Connections	Type DP Side and Bottom Process Connections
<b>Typical Lengths*</b>	C to C = L + 11" (279 mm) Overall Length = C to C	C to C = L + 8" (203 mm) Overall Length = C to C + 11" (279 mm)	C to C = L + 9.5" (241 mm) Overall Length = C to C + 5-1/2" (140 mm)	C to C = L + 9.5" (241 mm) Overall Length = C to C + 5-1/2" (140 mm)
<b>Flag Indicator Material</b>	Plastic			
<b>Length of Indication, Max.</b>	228" (579 cm)			



Type BP Shown

LEVEL INDICATORS – VISUAL

\*Dimensional data varies due to connections, material and specific gravity.

Note: Additional materials, floats, connections and manufacturing techniques are available to extend lengths and operational capabilities. Please contact GEMS Sensors if the parameters above do not meet your requirements.

### 2. Material


Select desired material from those tabulated below. Mark the Code Number on your OrderIt! Check List. The pressure/temperature performance parameters are specified in the charts at right. Consult the factory with pressure/temperature requirements that fall outside the parameters shown here.

Materials	Code
Housing & Float	
PVC	1
Clear PVC Housing/ PVC Float	1A*
CPVC	2
PVDF	4

\* 2" Schedule 40 pipe

= Stock Material  
(Best economy and delivery).

### Pressure/Temperature Performance

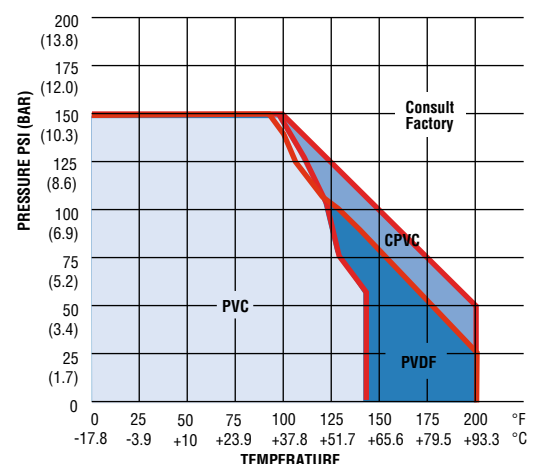





<p style="font-size: 1.5em; font-weight: bold;">267-673-8118</p> <p style="font-size: 1.2em; font-weight: bold; color: red;">Photocopy This Form</p> <p>Use one form for each product type you are selecting.</p>	<p>This is a <input type="checkbox"/> Request for a Quote      Name _____</p> <p style="padding-left: 100px;"><input type="checkbox"/> Order P.O.# _____      Company _____</p> <p>Quantity Needed _____      Street _____</p> <p>Date Required ____/____/____      City _____ State ____ Zip _____</p> <p>Shipping Method: _____      Phone ( ____ ) _____</p> <p>Partials Accepted: <input type="checkbox"/> Yes      Fax ( ____ ) _____</p> <p style="padding-left: 100px;"><input type="checkbox"/> No</p>
---	--

## SureSite Indicators, Engineered Plastic Versions – Standard Size

### Process Conditions

This information is essential to the accurate and proper operation of your SureSite® Visual Level Indicators. Please complete fully and accurately.

- |   |   |
|---|---|
| <p><b>1. Pressure:</b> Operating _____ psig    Maximum _____ psig</p> <p><b>2. Temperature:</b> Operating _____ °F    Maximum _____ °F</p> <p><b>3. Liquid Media:</b> _____</p> | <p><b>4. Specific Gravity @ Operating Condition:</b> _____</p> <p><b>5. Viscosity:</b> _____ SSU</p> <p><b>6. Application Location:</b> <input type="checkbox"/> Indoors    <input type="checkbox"/> Outdoors</p> |
|---|---|

### Physical Configuration

#### 1. Mounting Configuration Types:

☐ Type AP    ☐ Type BP    ☐ Type CP    ☐ Type DP

#### 2. Housing and Float Material:

☐ Code 1    ☐ Code 1A    ☐ Code 2    ☐ Code 3    ☐ Code 4

#### 3. Connection Codes – Complete all 4 connection code lines.

Check off NPT or Flange size where appropriate.

▼ Connection Code Number Goes Here. **Connection Code Numbers and their descriptions are on Page D-14.**

Top T	NPT	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____ <input type="checkbox"/> 150# (FF) <input type="checkbox"/> Other _____
Side Sa	NPT	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____ <input type="checkbox"/> 150# (FF) <input type="checkbox"/> Other _____
Side Sb	NPT	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____ <input type="checkbox"/> 150# (FF) <input type="checkbox"/> Other _____
Bottom B	NPT	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 1" <input type="checkbox"/> 2" <input type="checkbox"/> Other _____ <input type="checkbox"/> 150# (FF) <input type="checkbox"/> Other _____

#### 4. Length of Visual Indication – L: \_\_\_\_\_ inches (228", Max.).

Connection to Connection Dimension – C to C: \_\_\_\_\_ inches.

#### 5. Flag Type: Plastic (Orange and White)

#### Special Instructions (Materials, Connections, etc.)

\_\_\_\_\_

\_\_\_\_\_

### Accessories (Pages D-16 to D-18)

#### 1. Transmitters (Continuous Electrical Indication):

☐ Standard – 300°F (149°C)    ☐ Explosion-Proof

#### 2. J-Box/Signal Conditioners Accessories:

☐ Terminal Strip    ☐ 4-20 mA Output    ☐ 0-5 VDC Output

☐ 0-12 VDC Output

#### 3. Power Supply:

☐ 115 VAC (Input) /24 VDC (Output)  
 (Optional)    ☐ 230 VAC (Input) /24 VDC (Output)

#### 4. Switch Modules (Single Point): \_\_\_\_\_ Quantity (only if required)

a. ☐ SPST    ☐ SPDT    ☐ DPDT 120 VAC    ☐ DPDT 24 VDC

b. ☐ Standard – 300°F (149°C)    ☐ High Temperature

☐ Explosion Proof

#### 5. Indicating Scales:

☐ Feet and Inches    ☐ Inches    ☐ Metric    ☐ Blank

☐ Custom Graduations; specify: \_\_\_\_\_

Please Contact **C A Briggs Company** for any Special Configurations  
 Or requirements not covered on this form. **267-673-8117**


Quote: \$ \_\_\_\_\_    Date Quoted: \_\_\_\_/\_\_\_\_/\_\_\_\_




## Continuous Electrical Output Transmitters for all SureSite Indicators

Broaden the SureSite Indicator's capabilities; add one of these transmitters. You can have visual indication and a continuous electrical output too without additional tank penetrations. Use them to know what's in your tank remotely, send the signal to your controller, schedule your next inventory.

These transmitters are compatible with the readout displays at the end of this Section (D-28 to D-30) or can interface directly to your equipment by specifying the appropriate output.

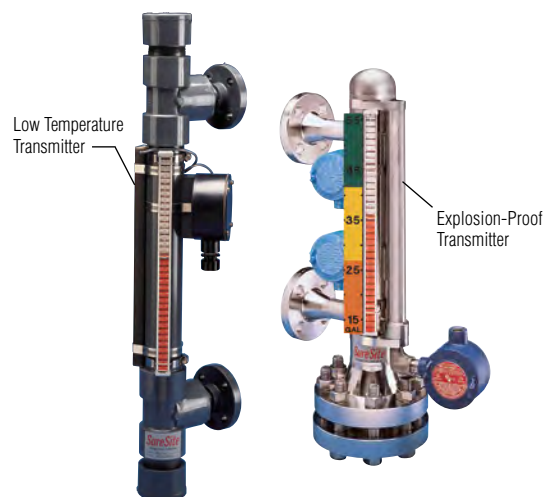Select your transmitter preference on the SureSite Product Check List (pages D-6, D-9, D-12 and D-15).

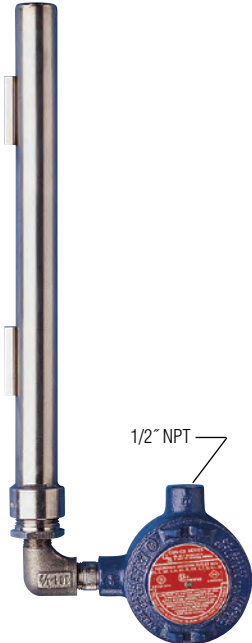

	Low Temperature Transmitter	Explosion-Proof Transmitter	Explosion-Proof / High Temperature Transmitter
			
<b>Compatible SureSite Types</b>	Plastic and Standard Alloy Units	Mini Alloys	Standard Alloy and High Performance Alloy Units
<b>Operating Temperature, Max.</b>	+300°F (149°C)	+300°F (149°C)	+750°F (399°C)
<b>Housing Materials</b>	Polysulfone	316 Stainless Steel	
<b>Output Termination</b>	Cable	Junction Box (Feralloy Iron)	
<b>Transmitter Resolution</b>		3/8" (9.5 mm)	
<b>Accuracy</b>		3/8" (9.5 mm)	

## Signal Conditioned Modules

Gems offers a variety of electrical Junction Boxes with built-in Signal Conditioners to increase the versatility of SureSite Indicators. Voltage outputs available:

- 0-5VDC
- 0-10VDC
- 0-12 VDC

Current output available:

- 4-20mA (loop powered)

Electrical specifications and ordering information for these units are found on Page D-17. Junction boxes with terminal blocks are also on Page D-17.

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974  
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: [Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

## Intrinsic Safety



Operation is intrinsically safe when transmitters are properly connected with a Gems, or other appropriate, zener barrier in Section L.

# Signal Conditioning Modules, 0-5 VDC, 0-12 VDC and 4-20 mA Outputs

Provide signal conditioning as an integral part of the SureSite® Level Indicators

- ▶ Stem Mounted
- ▶ J-Box Enclosed
- ▶ Panel Mounted

Gems signal conditioners provide outputs for direct connection to a wide range of instrumentation. They are ideal for large, multi-tank complexes. Units with 4-20 mA outputs are particularly well suited for instrumentation control loops. No intermediate receiver is required.

## Specifications (Not included in table below)



Operating Temperature	+5°F to +160°F (-15°C to +71°C)
Storage Temperature	-40°F to +212°F (-40°C to +100°C)
Output Temperature Coefficient (% of full scale, max.)	±0.00388%/°F (±0.007%/°C)
4-20 mA Types	To within ±1% of 16 mA

## Excitation Required for Transmitters using 4-20 mA Signal Conditioners

The minimum excitation required for operation of transmitters with 4-20 mA, DC signal converters (See chart at right) can be determined for a given total loop resistance from the graph shown. (Total loop resistance = the sum of the DC termination resistance plus loop resistance.) For optimum operation, which is a function of source voltage (+V<sub>A</sub>) and total loop resistance, the source voltage value used should be above the minimum load line for the related loop resistance.

## How To Order

Select Part Number based on Output Signal desired and SureSite Indicator being used.

Electrical Termination Method	Output Signal	Input Voltage	Module Part Numbers For:	
			SureSite Low Temperature	SureSite High Temperature
 Junction Box	0-5 VDC	8-24 VDC	86156	52536
	0-12 VDC	15-30 VDC	85997	52537
	4-20 mA	10-40 VDC	86158	152800
 Panel Mount with Plug-In Base	4-20 mA	10-40 VDC	112300 ⚡	112300 ⚡

⚡ = Stock item



J-Box Enclosure




Panel Mounted (Plug Base)

## Power Supply Module


Input Power	Part Number
115 VAC, 60 Hz	52560
230 VAC, 60 Hz	52570

Operates on 115 VAC or 230 VAC inputs to supply a regulated 24 VDC to the signal conditioned transmitter where external VDC power is not available. Maximum Load: 70 mA.

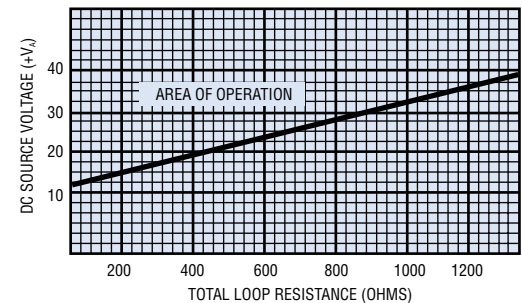


## Switch Modules Provide High-, Low- or Intermediate-Level Alarms or Control Logic

### Standard Switch Modules

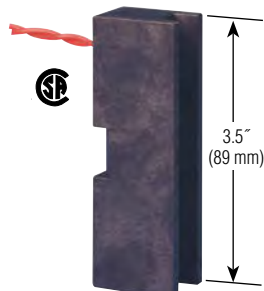


- CSA Approved
- Includes Stainless Steel Mounting Clamp
- Polysulfone Housing
- Withstands Temperatures to 300°F (148.9°C)
- Connection: 1/4" FNPT

### High Temperature Switch Module

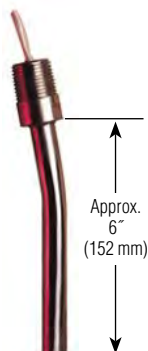

- Withstands Temperatures of 750°F (399°C)
- 316 Stainless Steel Construction
- 1/2" MNPT Conn.
- Includes Stainless Steel Mounting Clamp

### Explosion-Proof Switch Module

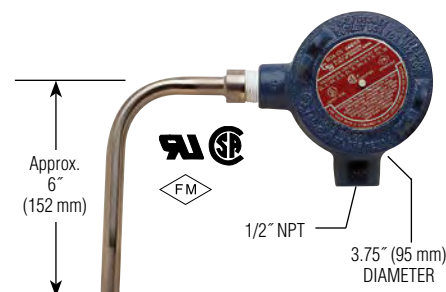

- UL, CSA, FM Approved
- Withstands Temperatures of 750°F (399°C)
- J-Box Terminated
- Stainless Steel Construction
- Includes Stainless Steel Mounting Clamp

### Switch Logic (All Models)


	<b>Lead Wires Up</b>	Switch closes on rising level and remains closed until opened by falling level.
	<b>Lead Wires Down</b>	Switch opens on rising level and remains open until closed by falling level.



**For Intrinsic Safety...** These switch modules can be rendered intrinsically safe with the use of GEMS SAFE-PAKS® and Zener Barriers. See Section L.

### Mounting

Switches mount opposite flags (180°) and may be positioned next to each other for multiple actuation requirements.

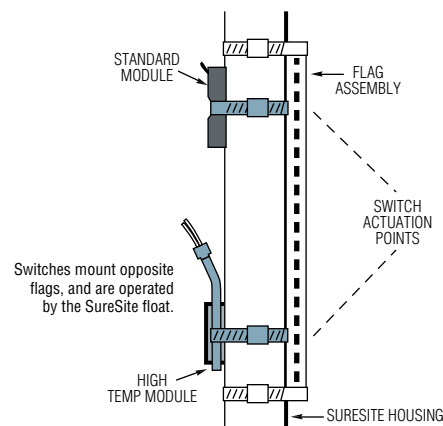

### How To Order

Switch modules can be added to any SureSite Indicator at any time. Specify the Part Number and quantity of switches desired on Product Check List.

Switch Type		Rating*	Part Numbers – Based on SureSite Version		
			Alloy & ASME SureSite	Mini SureSite	Plastic SureSite
Standard	SPST	20VA	86435	86567	80469
Hi-Temp	SPST	20VA	83150	83150-M	83150-P
	SPDT	20VA	84320	84320-M	84320-P
Explosion-Proof	SPST	20VA	83130	83130-M	83130-P
	SPDT	20VA	84330	84330-M	84330-P
	DPDT, 120 VAC	10A	83100	83100-M	83100-P
	DTDT, 24 VDC	10A	83110	83110-M	83110-P

\* See "Electrical Data" on Page X-5 for more information.

⚡ = Stock item

## Indicating Scales


These optional stainless steel indicating scales provide a numerical readout of the liquid level in addition to the flag indication. They mount alongside the flag assembly for easy viewing.

- Available in 1.5" and 3" wide versions.
- Markings: Feet and Inches

Inches

Metric (Decameter, centimeter, millimeter)

Custom marked graduations such as gallons, liters or percentage available.

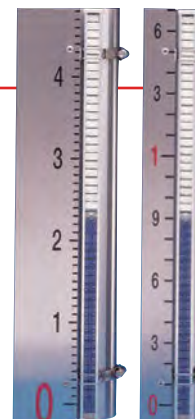



## LED Transmitter Versions – Miniature Size

- ▶ LED indicators ideal in low or no ambient light
- ▶ Integral transmitter with choice of signal conditioned output
- ▶ Lengths to 10 feet (3 meters)
- ▶ Pressures to 400 PSI (27 bar) – Temperature to 300°F (149°C)

These Mini SureSite Indicators excel where zero and low ambient light make visual indicators difficult to read. These mini indicators feature all the benefits of a SureSite, like safe and durable stainless steel process fluid containment, while combining a continuous output transmitter with a bright LED channel.

The LED indicator assembly integrates a continuous level transmitter reducing overall footprint. A variety of signal conditioners provide the output you require. Forget the flashlights and squinting required to view antiquated sightglasses.

### Typical Applications

- Pharmaceuticals • Medical Equipment • Food and Beverages
- Marine • Rail • Boilers

### Specifications

<b>Indication Length</b>	5" to 120" (13 to 305 cm) in 0.5" (13 mm) increments
<b>Media</b>	Waters, Coolants, Light Oils, Diesel, Hydraulics
<b>Specific Gravity</b>	Minimum 0.8 SG to 1.2 SG
<b>Materials</b>	
<b>Chamber Housing</b>	316/316L Stainless Steel
<b>Float</b>	316/316L Stainless Steel
<b>Shroud</b>	Polycarbonate
<b>O-Ring (Wetted)</b>	Viton®, unless otherwise specified
<b>J-Box Enclosure</b>	Die cast Aluminum
<b>Reliability and Durability</b>	Expected 10 year service life
<b>Performance</b>	
<b>Resolution</b>	3/8" (9.5 mm)
<b>Accuracy</b>	±1/2" (13 mm)
<b>Output Signal</b>	4-20 mA to within ±3% of full scale
<b>Temperature Ranges</b>	
<b>Process</b>	-40°F to +300°F (-40°C to +149°C)
<b>Ambient</b>	-40°F to +160°F (-40°C to +71°C)
<b>Operating Pressure</b>	Vacuum to 400 psig (27.6 bar)
<b>Environmental</b>	Enclosure: NEMA 4X IP65 (Water Resistant)
<b>Input Power</b>	20 to 28VDC, @100mA. Consult Factory for other voltages
<b>Outputs</b>	4-20 mA continuous current loop (3 wire) 0-5 V continuous (3 wire) 0-10 V continuous (3 wire)
<b>Mechanical Interface</b>	Custom configured for tank (per mini SureSite offering), 1/2" NPT to junction box
<b>Mounting Orientation</b>	
<b>Unit Positions</b>	AM-L, BM-L, CM-L, DM-L
<b>Shroud Position</b>	See Selection Guide; Step 2 for Codes
<b>Calibration</b>	Field Adjustment Null and Span/Factory Calibrated



## 1. Mounting Configuration Type

Based on process connection locations.

	Type AM-L Top and Bottom Process Connections	Type BM-L Side and Side Process Connections	Type CM-L Top and Side Process Connections	Type DM-L Side and Bottom Process Connections
Typical Lengths*	C to C = L + 9.5" (241 mm)	C to C = L	C to C = L + 6" (152 mm)	C to C = L + 6" (152 mm)
Length of Indication (Uninterrupted)	120" (305 cm), Maximum			

\* Formula provided is for approximation only. Final dimensions will vary due to connections type, position, cable or junction box location, and specific gravity of process liquid. Gems will confirm final dimensions before manufacturing.

## 2. LED Transmitter Assembly Location

Position relative to process connection location. All illustration views are from the top. Codes with "+" indicate views when 3/4" side ports are used.

Transmitter Assembly Location Code						
A	A+	B	C	D	E	E+
Approximate angle of view - 270°						

## 3. J-Box Location

Drawings are typical, and for reference only. Final, specific locations are determined at time of manufacture.

J-Box Location Code		
1 Side Mount Below Bottom Port	2 Side Mount Above Top Port	3* Top Mount

\* Requires a Blind Fixed Top Connection. See Connection Code T1 in the chart on next page.

## LED Assembly Cable Egress

For J-Box Location 1,  
LED Transmitter Assembly  
cable will egress from the  
bottom of the assembly.






For J-Box Locations  
2 and 3, the cable will  
egress from the top of  
the assembly.



## 4. Connection Codes

(See complete descriptions below)

		Blind		NPT				Flange		Weld	
				Fixed		Removable		Fixed	Removable	Socket Butt	Removable Butt
		Fixed	Removable	Female	Male	Female	Male				
TOP 	<b>Standard Connections</b>	T1	T10	T2	T3	T11	T12	T19	T20	T18	T13
	<b>Sanitary Connections</b>							T7	T8		
SIDE 	<b>Sa</b>										
	<b>Sb</b>										
BOTTOM 	<b>B</b>										
	<b>Standard Connections</b>	B1	B10	B2	B3	B11	B12	B19	B20	B18	B13
	<b>Sanitary Connections</b>							B7	B8		

— Connection Codes and Materials background-shaded in this color are stocked by Gems. Select these connections where possible to obtain the most economical SureSite Indicators with prompt delivery.

Note: Gems recommends a removable top and/or bottom connection for float access.

## Connection Code Descriptions

Please provide all connections when completing the **OrderIt!** Product Check List (located on the following page).

**Note:** Before selecting your connections, consider incorporating your vent and drain requirements.

## T &amp; B (Top and Bottom)

- T/B 1. Welded cap  
T/B 2. Welded cap with FNPT  
T/B 3. Welded cap with MNPT  
T/B 7. Sanitary flange  
T/B 8. Sanitary flange with mating blind flange  
T/B 10. Standard fixed flange/mating blind flange  
T/B 11. Standard fixed flange/mating FNPT reducing flange

- T/B 12. Standard fixed flange/mating flange with MNPT nipple  
T/B 13. Standard fixed flange/mating flange with butt weld nipple  
T/B 18. Welded cap with butt weld nipple  
T/B 19. Welded cap with ANSI flange  
T/B 20. Standard fixed flange/mating reducing flange spool with ANSI flange

## Sa &amp; Sb (Sides)

- S1. No connection  
S2. MNPT nipple  
S3. FNPT coupling  
S4. ANSI flange  
S5. Sanitary flange  
S6. Buttweld nipple

## 5. Signal Conditioner Assemblies

Gems signal conditioners provide outputs for direct connection to a wide range of instrumentation. They are ideal for large, multi-tank complexes. Units with 4-20 mA outputs are particularly well suited for instrumentation control loops. Consult LED SureSite Installation, Operation and Maintenance bulletin.



<p style="font-size: 1.2em; font-weight: bold;">267-673-8118</p> <p style="font-size: 1.2em; font-weight: bold; color: red;">Photocopy This Form</p> <p>Use one form for each product type you are selecting.</p> <p><small>This form may also be completed online at <a href="http://gemssensors.com">gemssensors.com</a> for RFQ.</small></p>	<p>This is a <input type="checkbox"/> Request for a Quote      Name _____</p> <p style="padding-left: 40px;"><input type="checkbox"/> Order P.O.# _____      Company _____</p> <p>Quantity Needed _____      Street _____</p> <p>Date Required ____/____/____      City _____ State ____ Zip _____</p> <p>Shipping Method: _____      Phone ( ____ ) _____</p> <p>Partials Accepted: <input type="checkbox"/> Yes      Fax ( ____ ) _____</p> <p style="padding-left: 40px;"><input type="checkbox"/> No      Email _____</p>
---	---

## LED SureSite Indicator/Transmitter, Alloy Versions – Miniature Size LED Process Conditions

This information is essential to the accurate and proper operation of your SureSite® Visual Level Indicators. Please complete fully and accurately.

- |   |   |
|---|---|
| <p><b>1. Pressure:</b> Operating _____ psig    Maximum _____ psig</p> <p><b>2. Temperature:</b> Operating _____ °F    Maximum _____ °F</p> <p><b>3. Liquid Media:</b> _____</p> | <p><b>4. Specific Gravity @ Operating Condition:</b> _____</p> <p><b>5. Viscosity:</b> _____ SSU</p> <p><b>6. Application Location:</b> <input type="checkbox"/> Indoors    <input type="checkbox"/> Outdoors</p> |
|---|---|

### Physical Configuration

#### 1. Mounting Configuration Types:

☐ Type AM-L    ☐ Type BM-L    ☐ Type CM-L    ☐ Type DM-L

Length of Visual Indication – **L:** \_\_\_\_\_ inches (120", Max.)

Connection to Connection – **C to C:** \_\_\_\_\_ inches (calculated)

#### 2. LED Transmitter Assembly Location:

1/2" Side Ports: ☐ A    ☐ B    ☐ C    ☐ D    ☐ E

3/4" Side Ports: ☐ A+    ☐ C    ☐ E+

#### 3. J-Box Location:

☐ 1    ☐ 2    ☐ 3

#### 4. Connection Codes – Complete all 4 connection code lines. Check off NPT or Flange size where appropriate.

▼ Connection Code Number Goes Here. **Connection Code Numbers and their descriptions are on Page D-21.**

Top <b>T</b>	NPT or Weld	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____ <input type="checkbox"/> Other _____
Side <b>Sa</b>	NPT or Weld	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____ <input type="checkbox"/> Other _____
Side <b>Sb</b>	NPT or Weld	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____ <input type="checkbox"/> Other _____
Bottom <b>B</b>	NPT or Weld	Flange
	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> Other _____	<input type="checkbox"/> 1/2" <input type="checkbox"/> 3/4" <input type="checkbox"/> 1" <input type="checkbox"/> 150# RF <input type="checkbox"/> 300# RF <input type="checkbox"/> Other _____ <input type="checkbox"/> Other _____

#### 5. Supply/Conditioner:

Supply Voltage: ☐ 5 VDC    ☐ 12 VDC    ☐ 24 VDC

Output: ☐ 4-20mA    ☐ 0-5 VDC    ☐ 0-10 VDC

#### 6. O-Ring Material:

☐ Viton® (Standard)    ☐ Ethylene Propylene

☐ Other \_\_\_\_\_

#### Special Instructions (Materials, Connections, etc.)

#### Special Instructions (Materials, Connections, etc.)

Please Contact **C A Briggs Company** for any Special Configurations Or requirements not covered on this form. **267-673-8117**

Quote \$ \_\_\_\_\_      Date Quoted \_\_\_\_/\_\_\_\_/\_\_\_\_




## DIPTAPE Visual Level Indicators – Manually Operated

These manually-operated indicators are compact and completely self-contained. They need no electricity to provide continuous indication of liquid level in storage tanks and vessels. DIPTAPE Indicators are ideal for quick, periodic readouts that are accurate to 1/16 inch or 1 mm; especially in remote areas where power is unavailable, or undesirable. Only the float and stem contact the liquid, so the readout tape is always clean and readable.

Custom-configurable DIPTAPE Indicators described on the following pages are available in a broad range of materials and mounting types in lengths to six feet (1.8 m). For lengths six to ten feet, consult factory.



### General Operating Principle

A magnet-equipped float moves with liquid level along the unit stem, inside the storage vessel. Level readout is obtained by simply removing the protective cap atop the unit and lifting the calibrated indicator (within the unit) until magnetic interlock with the float is felt. The indicator is held at this point and level is read where the calibration aligns with the top of the mounting. The indicator is then lowered back inside the unit for storage and is protected by the screw type cap when not in use.

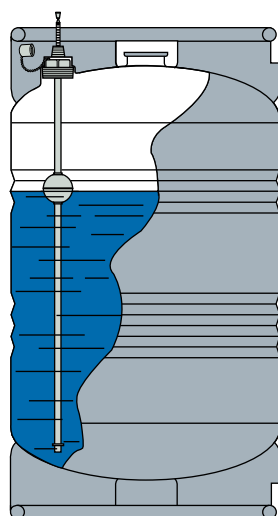

### Typical Application

Refillable, portable chemical tanks are monitored and exchanged when empty. DIPTAPE Indicators maintain a “closed” system on tanks or drums containing environmentally hazardous liquids and vapors. Plus, their rugged construction stands up to the rigors of transportation.

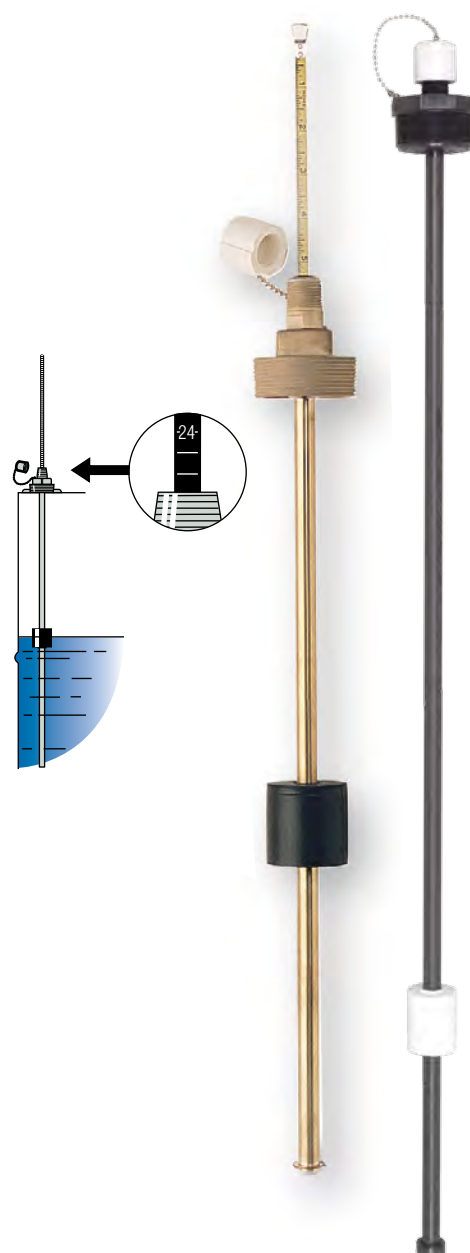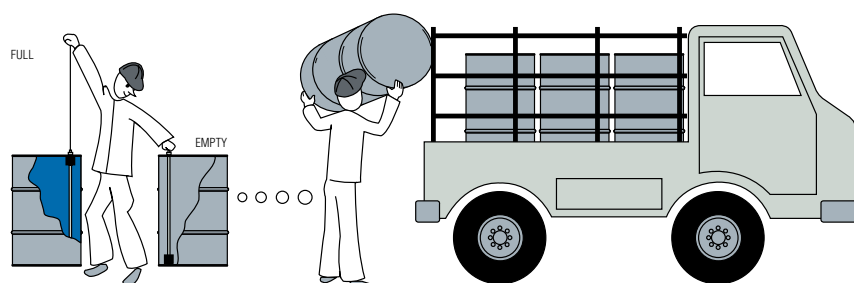

Contents	Page Start
All-PVC Versions .....	D-24
Engineered Plastic Versions .....	D-25
Alloy Versions .....	D-26



## All-PVC Versions Are Economical for Light Duty

**ORDERIT!**


Ordering is Easy! See Page D-27.  
Easy online ordering too!

- ▶ Temperatures to 140°F (60°C)
- ▶ Pressures to 15 PSI (1 bar) Max.

Ideal for chemical storage tanks, our all-PVC DIPTAPE Indicators provide one of your best values for liquid level monitoring. These light duty versions are recommended for use in calm liquids and ambient temperature and pressure levels. See Engineered Plastic versions on the next page for enhanced performance characteristics.

### 1. Mounting Types

"B" Dimension (Length Overall):  
Indicating Length + 1-7/8" (47.6 mm)

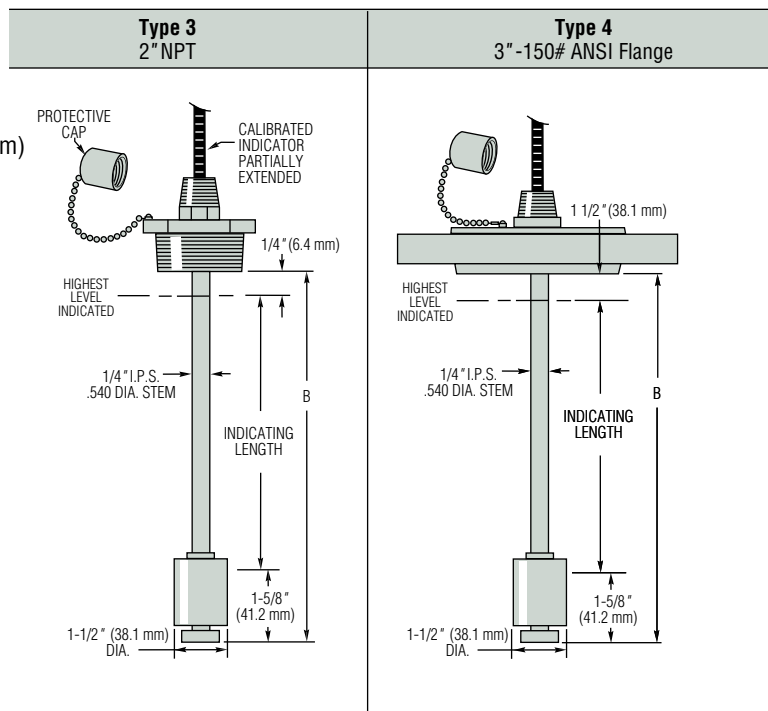

Stem, Float and Mounting Material	PVC
Min. Liquid Specific Gravity	0.65
Operating Temperatures	0°F to +140°F (-17.7°C to 60°C)
Operating Pressure, Max.	15 psi (1 bar)
Indicating Length*	6" to 72" (15.2 cm to 182.9 cm)
Std. Indication Markings	1/16" or 1 mm increments

\*For longer lengths, please consult factory.

### Ordering Is Easy

1. To specify DIPTAPE Level Indicators, start by photocopying the OrderIt! Product Check List located on Page D-27.
2. Use the product information in this section to make your selections on the Check List. Please use a separate Check List for each unique configuration.
3. Fax your completed OrderIt! Check List to Gems for a price quotation.  
Fax: 860-747-4244

## Engineered Plastic Versions Offer Best Chemical Resistance


- ▶ Temperatures to 140°F (60°C)
- ▶ Pressures to 50 PSI (3.4 bar)

With a choice of three highly resistive, engineered plastic materials, large floats and 1/2 inch IPS stems, these DIPTAPE Indicators provide rugged durability in almost any chemical tank. For higher temperature and pressure capability, review the alloy versions on next page.

### 1. Mounting Types

"B" Dimension  
(Length Overall):  
Indicating Length + A + C

Note: Dimensions "A" and "C"  
are dependent on float selected.  
See Float Types below.

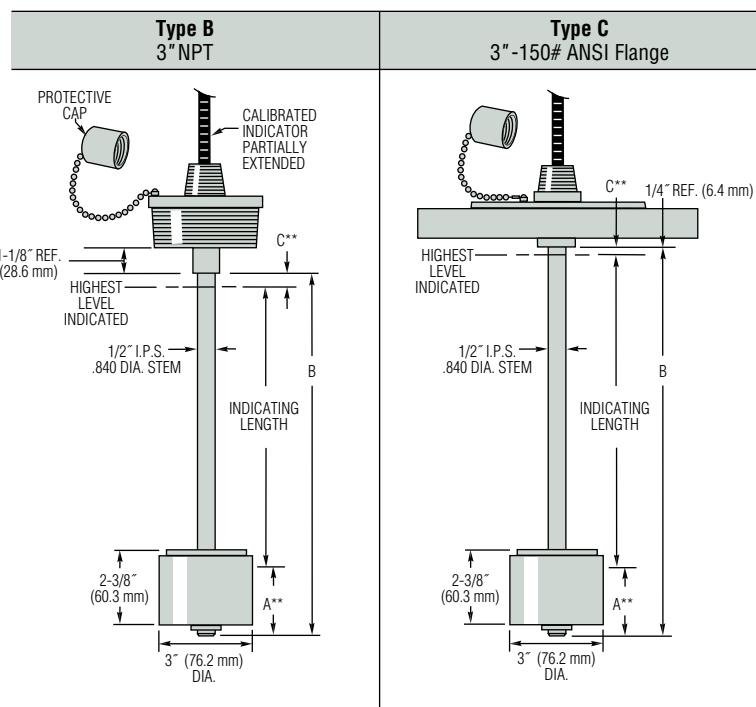

<b>Stem and Mounting Material</b>	PVC, PVDF or Polypropylene
<b>Indicating Length*</b>	6" to 72" (15.2 cm to 182.9 cm)
<b>Std. Indication Markings</b>	1/16" or 1 mm increments

\*For longer lengths, please consult factory.

\*\*Dimensions listed below, under "Float Types."

### 2. Float Types

<b>Float Material</b>	PVC	Polypropylene	PVDF
<b>Part Number</b>	<b>71741</b>	<b>73742</b>	<b>73740</b>
<b>Min. Liquid Specific Gravity</b>	0.65	0.46	0.83
<b>Operating Temperatures</b>	+40°F to +140°F (+4.4°C to +60°C)		
<b>Operating Pressure, Max.</b>	50 psi (3.4 bar)		
<b>"A" Dimension (From Mounting Types)</b>	1-3/4" (44.4 mm)	1-3/8" (34.9 mm)	2-3/16" (55.6 mm)
<b>"C" Dimension (From Mounting Types)</b>	15/16" (23.8 mm)	1-5/16" (33.3 mm)	1/2" (12.7 mm)

**ORDER IT!**

Ordering is Easy! See Page D-27.  
Easy online ordering too!



LEVEL INDICATORS - VISUAL

## DIPTAPE™ Indicators – Alloy Versions


- ▶ Temperatures to 300°F (148°C)
- ▶ Pressures to 750 PSI (52 bar)

Rugged brass or stainless steel units are ideal for use in water and oils. Select these units for best temperature and pressure capabilities.

### 1. Mounting Types

"B" Dimension  
(Length Overall):  
Indicating Length + A + C

Note: Dimensions "C" and "A"  
are dependent on float selected.  
See Float Types below.

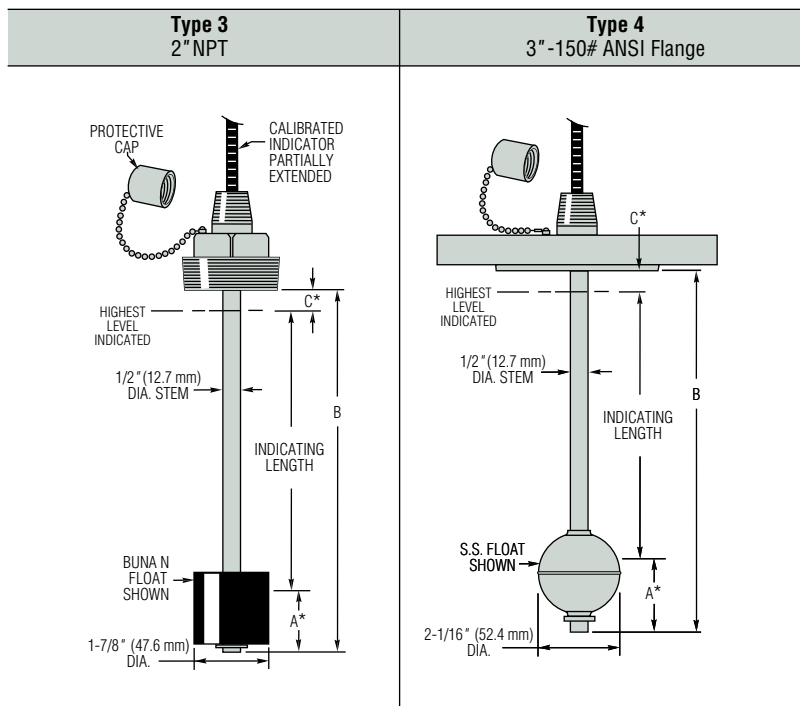

**ORDER IT!**  
Ordering is Easy! See Page D-27.  
Easy online ordering too!



Stem and Mounting Material	Brass or 316 Stainless Steel	316 Stainless Steel Stem with Carbon Steel or 316 Stainless Steel Flange
Indicating Length**	6" to 72" (15.2 cm to 182.9 cm)	
Std. Indication Markings	1/16" or 1 mm increments	

\* Dimensions listed below, under "Float Types."

\*\* For longer lengths, please contact factory.

### 2. Float Types

	Buna N*	Stainless Steel	
Float Part Number	73710	73709	138935
Min. Liquid Specific Gravity	0.45	0.67	0.67
Operating Temperatures	Oil: -40°F to +230°F (-40°C to +110°C) Water: to 180°F (+82.2°C)	-40°F to +300°F (-40°C to +148.8°C)	-40°F to +220°F (-40°C to +104°C)
Operating Pressure, Max.	300 psi (21 bar) max. @ 77°F (25°C)	750 psi (52 bar) Mounting Type 3 150 psi (10 bar) Mounting Type 4	150 psi (10 bar)
"A" Dimension (From Mounting Types)	1-1/4" (31.7 mm)	1-3/8" (34.9 mm)	1" (25.4 mm)
"C" Dimension (From Mounting Types)	11/16" (17.5 mm)	3/4" (19.05 mm)	9/16" (14.3 mm)

\* Other Wetted Material: Hysol.


Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974  
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: [Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

Alloy DipTape / p1of1 / 3-APR-14


# ORDER IT!

## GEMS Receivers Tell You What Your Sensors Already Know

GEMS Receivers house a numerical digital readout, and all of the calibration adjustments for a complete Continuous Level Indication system. Those receivers designed for the XM-Series transmitters also include a power supply for the transmitter.

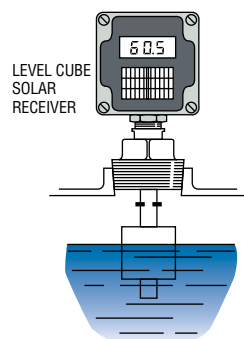

Level Cube with 1/2" NPT shown mounted directly on GEMS XM-Series Transmitter. Or, they may be mounted remotely, up to 100 feet from the transmitter.

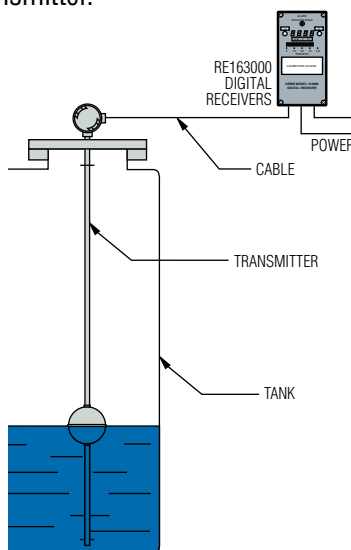

### 3-Digit Level Cube Receivers



### Digital Bargraph Receivers



These units feature a large 4-digit display and bright LED bargraph to visually clarify relative tank content level.

### Selector Guide

The Selector Guide below lists standard GEMS Receivers and the transmitter series with which they are normally configured. GEMS doesn't stop, however, with the standard designs shown in this catalog. Our experienced engineering staff will custom design receivers to suit your application. Don't hesitate to contact us about your special requirements.

Receivers	Mounting*	Alarm	Operating Voltage	Compatible GEMS Products
<b>3-Digit Level Cube Receivers</b>	Wall or Transmitter	None	9V Battery, 9 VDC / 117 VAC, Solar	XM-Series (1/4" or 1/2" Resolution), and SureSite Transmitters
<b>RE163000</b>	Panel or Wall	2 Alarm	90-120 VAC, 20-50 VDC	All Continuous Transmitters, SureSite Transmitters, Pressure Transmitters

\*Mounting Definitions:

Wall: Mounted **onto** a surface; i.e., wall, bulkhead, deck, etc.

Panel: Mounted **into**, and approximately flush with, a surface through a cutout.

Transmitter: Mounted directly to the top of the transmitter.






## 3-Digit Level Cube Receivers

For use with GEMS Transmitters and SureSite® Transmitters.

These compact, low-cost Level Cubes provide accurate, continuous 3-digit readout of liquid level. The indicating range and decimal point location on the display are quickly and easily selectable with the readout plainly visible.

### 3 Power Choices with NPT or Cable Mounted

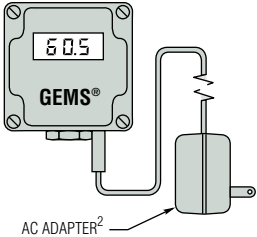9-V Battery Powered	9 VDC/117 VAC Powered	Solar-Powered
		
Part Numbers: 118600—Cable Output 119250—1/2" NPT	Part Numbers: 118620—Cable Output 119270—1/2" NPT	Part Numbers: 118610—Cable Output 119260—1/2" NPT

#### Notes:

- 9-V Alkaline Battery Powered Units:** Two batteries (supplied) are snapped into terminals in Cube. On/Off switch available
- 9 VDC/117 VAC Powered Units:** Power is supplied from AC adapter. A plug, Part Number 119218, is available for use where 7-VDC power is supplied by customer. These units are not watertight.
- Solar-Powered Units:** Sunlight or a flashlight beam directed on a solar cell in the front cover is all that's needed to operate.

### Specifications

Housing Material	Polycarbonate, NEMA-4X, watertight*
Cable Distance from Transmitter	100 feet, Max.
Operating Temperature	+23°F to 131°F (-5°C to +55°C)
Accuracy	± 2%

\*Except for 9 VDC/117 VAC Powered Units which are not watertight.


### How To Order – Standard Models

Style	Mounting	Part Number
9-V Battery	Cable Output	118600
	1/2" NPT	119250
9 VDC / 117 VAC	Cable Output	118620
	1/2" NPT	119270
Solar	Cable Output	118610
	1/2" NPT	119260

### NPT or Cable Mounted




#### Dimensions

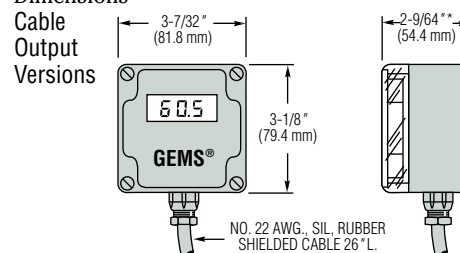


\* P/N 118600 9-V Battery = 3-11/32" (84.8 mm) only.

#### 1/2" NPT Versions

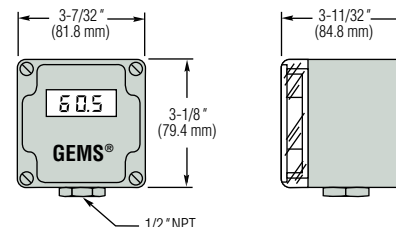


#### Typical Wiring Diagram

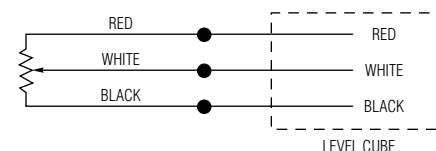

Note: For ullage indication, transpose red and black connections.

#### Easy to Adjust and Calibrate

Adjustments must be performed with cover removed (see illustration) and power applied. Results are observed on the front display.

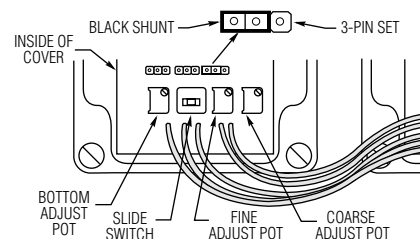

**To position decimal point:** Place black shunt over left two pins of proper 3-pin set for desired decimal in display. For no decimal, place shunt over right two pins of any set.

## Digital Bargraph Display Receivers - 163000 Series


Gems Digital Bargraph Receivers improve the way you are able to visualize the data being received from your liquid level transmitters. These new receivers display liquid level information in digital numerals in conjunction with a 0-100% LED bargraph readout. The numeric portion is a 1/2" 4-digit display that provides detailed quantification of tank contents, while the bright LED bargraph represents the tank contents as a bar length relative to the percentage of fluid volume within the tank.

If you have a non-linear tank, such as a sphere or a cylinder laying on its side, these receivers are a blessing. They can be calibrated easily so that the digital and bargraph displays will indicate accurate content information for "odd" shape tanks. See "Linearization" below.

In addition to the dual visual displays, the Gems Bargraph Receiver features two independent alarms with adjustable time delays, 10 amp auxiliary dry contacts and easy user set-up. The receiver is available in component form for mounting into custom enclosures or panels, or housed within a NEMA 4X enclosure.

2 Independent Alarms with adjustable time delays. Labels are supplied and user applied.

Example of units measured: Gallons, Liters, Pounds, etc. Labels are supplied and user applied.

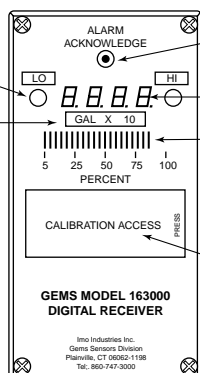

Touch to acknowledge alarm activation.

Large 4 Digit Numerical Display.

LED Bargraph represents percentage of tank contents.

Calibration conveniently accessible from front of panel (access plate is supplied loose in a cloth bag along with labels).

### Linearization

Certain tanks, like a sphere or a cylinder laying on its side, are considered "Non-Linear" in terms of volume versus tank height. In these cases this receiver may be linearized according to your tank parameters so that the correct volume is displayed. Any units may be displayed by the receiver. Gallons, inches, tons, cubic inches, liters and etc.

The receiver uses a scheme where 9 points or 8 straight lines are used to calculate the numbers to be displayed. These 8 lines approximate the curve of the non-linear tank.

### Examples of Non-Linear Display Values.

1. Gallons in a spherical tank.
2. Gallons in a cylindrical tank laying down.
3. Pounds of liquid in a spherical tank.
4. Cubic meters in a conical shaped tank.
5. Gallons in a non-linear shaped tank.

**IMPORTANT:** Customer must supply a sounding table, capacity curve and/or tank drawing for linearization of the digital bar graph display receiver.

### Specification

Input Signal	4-20mA, Proportional Voltage*, Serial
Accuracy Over Given Range	± 1.0%
Operating Voltage	24VDC or 115VAC
Operating Temperature	32°F to 122°F (0°C to 50°C)
Alarm Contacts, Load	10Amp, Dry Contact
Digital Readout	0000 to 9999

\* Proportional voltage as produced by the non-signal conditioned Gems Liquid Level Transmitters (Section H) and SureSite Transmitters (Section G).

Note: Customer alarms (High & Low) set upon request.

### Panel Mounted Versions




### Enclosed Versions




Dimensions

Panel Mounting Receivers

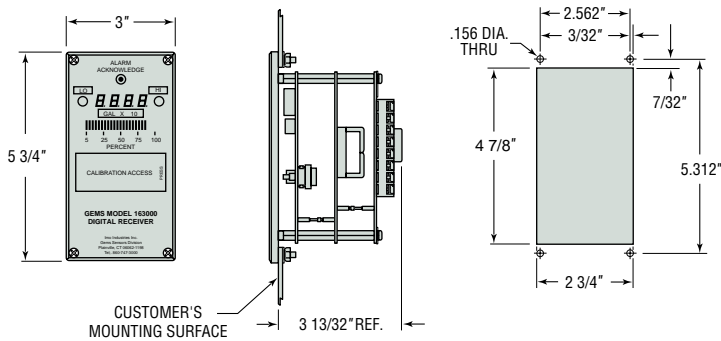


Static Sensitive.  
Handling Precautions Required.

NEMA 4X Enclosed Receivers

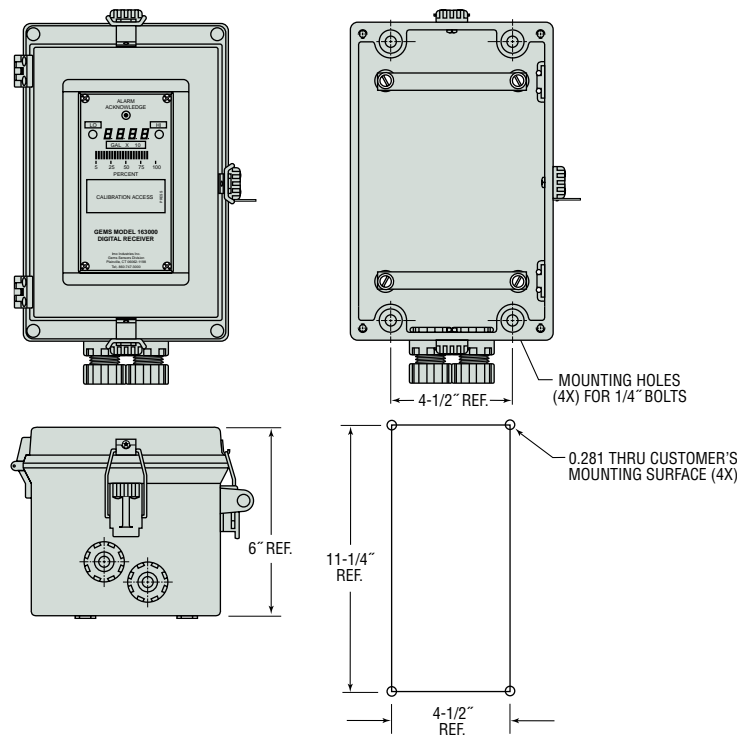

Typical Installation

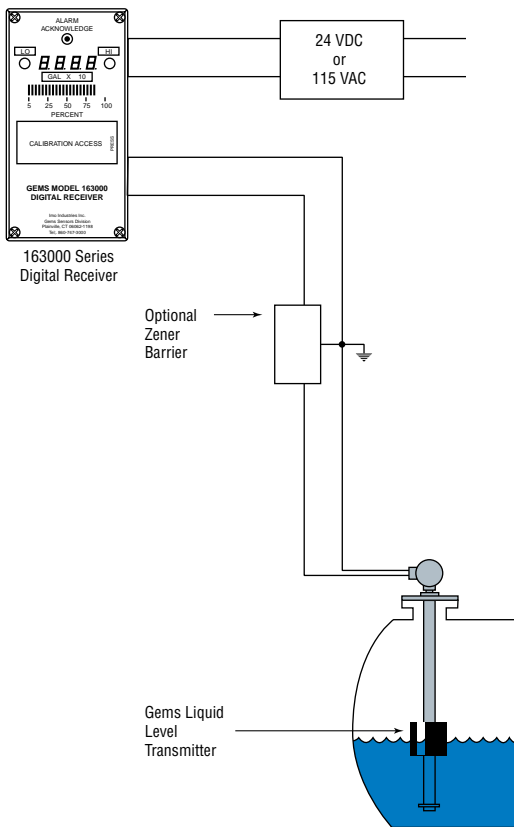

How To Order - Standard

Select receiver type by Part Number based on Input Power and Input/Output Signals required.

Input Power	Input/Output Signals		Part Number	
	Input	Output	Panel Mount	NEMA 4X Fiberglass Enclosed
24 VDC	Transmitter*	None	170680-0100	170690-0100
	Serial	None	170681-0100	170691-0100
	Transmitter*	4-20mA	170682-0100	170692-0100
	4-20mA	4-20mA	170683-0100	170693-0100
		None	170684-0100	170694-0100
115 VAC	Transmitter*	None	170685-0100	170695-0100
	Serial	None	170686-0100	170696-0100
	Transmitter*	4-20mA	170687-0100	170697-0100
	4-20mA	4-20mA	170688-0100	170698-0100
		None	170689-0100	170699-0100

\* Proportional voltage as produced by the non-signal conditioned Gems Liquid Level Transmitters (Sections C) and SureSite Transmitters (Section D). When used in conjunction with RE-163000, no additional signal conditioning required.