

PRESSURE

<https://www.cabriggs.com/ICON-PDFs.html>



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974


Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

OBS Series } One -Piece Design

- Completely Corrosion Resistant PP or PVDF Housing
- Integrally Molded Guard - One Piece Design
- 2½ - 3" Dial
- Configurable Range Markers
- Industry's Highest Accuracy - No Air Bubbles

NO COSTLY FILLING

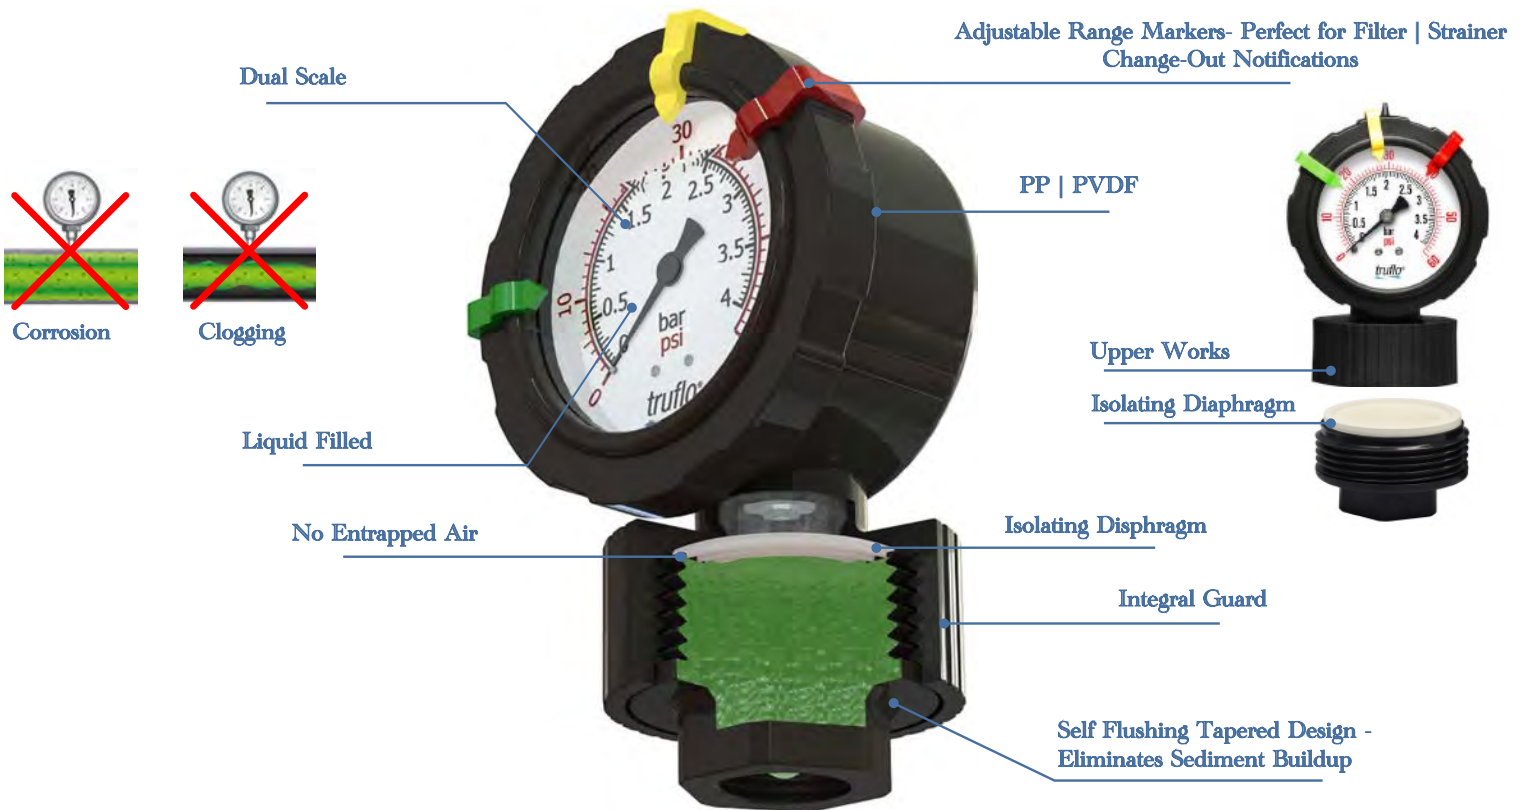

Corrosive Environment - 6 Months

Metal Gauge & Plastic Guard




PP Plastic Gauge & Integral Guard



Flanged Connections

High Purity
PVDF

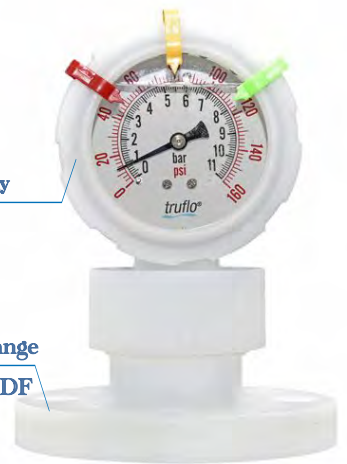

ANSI 150 lb Flange
PVC | PP | PVDF

OBS Series

Plastic Gauge with
Integral Gauge Guard

- Available in PVC | PP | PVDF
- Teflon® Diaphragm
- Designed to Act as Visual Pressure Alert
- Pressure Range Markers - Red | Yellow | Green
- Highest Accuracy: $\pm 1.5\%$
- Factory Pre-Filled
- One-Piece Molded Design | No Assembly
- 2½ - 3" Dial Size
- MNPT | FNPT | Flanged



Corrosion



Clogging



2VU

Double Sided Display



Big Ass Gauge

BAG

Extra Large 3" Dial



Head Rotates
360°


OBS-R

360° Rotator



OBS-A

Panel Mount

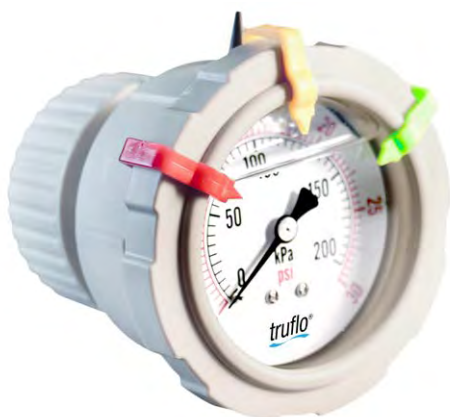

OBS-B
Center Mount



OBS-LC
LCD Battery Operated

OBS-LE Series

Pressure Transmitter + Switch All
Plastic Gauge + Guard **Red** -
Green LED Display

- 4-20mA Output
- 2 Pulse Relay Outputs
- LED Display-Changes from **Green** to **Red** when Relays are Active
- Teflon® Diaphragm
- PVC | PP | PVDF



OBS-C
Center Mount



OBS-P
Panel Mount

CORROSION

Solving Industry's Most Corrosive Applications



All Plastic Body Ensures Gauge is Suitable for Corrosive Environments

OBS-GO Series

All Plastic Pressure Gauges

- PP Housing Material
- Factory Pre-Filled
- 2½" Dial Size
- ¼" 316SS NPT Connection
- Adjustable Range Markers Perfect for Filter | Strainer Change Out



OBS Series

Plastic Gauge 316SS NPT Connection

- Available in Corrosion Resistant PP Housing
- Designed to Act as Visual Pressure Alert
- Pressure Range Markers - Red | Yellow | Green
- High Accuracy: $\pm 0.75\%$
- Factory Pre-Filled
- 2 1/2" Dial Size
- 1/4" 316SS NPT | G Connection



316SS 1/4" NPT | G Thread

OBS-GO




OBS-DGO
Double Sided



OBS-GO-C
Center Mount



OBS-V
Compound Vacuum
-30 + 30 PSI Range

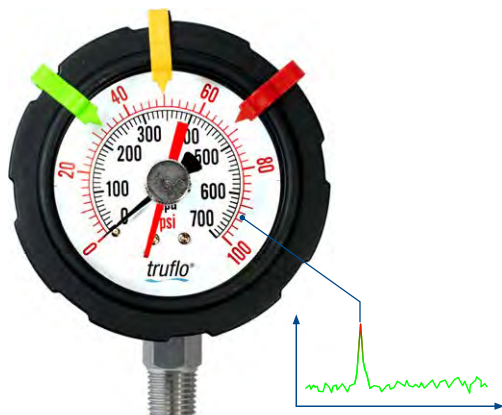

OBS-TT
Tell Tale
Indication of Pressure Surges or Spikes



OBS-GO4
4 1/2" Dial Size



GI Series
All Plastic Gauge Isolator

ACCELERATING... INNOVATION

*for Icon, the finish line is just a
stepping stone in the continuous
pursuit of further improvement*



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com



Corrosion-Free

Instrumentation Equipment