

Heavy-Duty Float Level Switch

for Start/Stop Pump Control



measuring
•
monitoring
•
analyzing

NEC



- Polypropylene or Hypalon®-Coated Floats w/PEC Clad Cables
- Unique, Isolated-Chamber Float Design
- SPDT Mechanical Switch (Mercury-Free)
- Max. Temperature: 185 °F / 194 °F
- Max. Pressure: 50 PSIG / 58 PSIG



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205



Description

The KOBOLD NEC Series float level switch for liquids provides mercury-free level switching for tank applications requiring high current capability. With such capacities, pumps may be directly controlled in many applications. The body of this float-type, heavy-duty, tilt level switch is constructed of industrial-quality polypropylene, and can be supplied with optional Hypalon® coating for superior chemical resistance. Additionally, a five-isolated-chamber design makes this float level switch almost impossible to sink. It is supplied with an adjustable ballast weight for easy installation into open tanks and a 16' or 30' cable. Extended cable lengths are available on request.

Specifications

Float Material

NEC: Polypropylene, Multi-Chamber Design
NEC-HY: Polypropylene with Vulcanized Hypalon® (Polyethylene Chloride) Elastomer Coating

Cable: 16' or 30' PEC Cladding (3-conductor)
(Longer Cables Available on Request)

Ballast (Weight): Included, Adjustable on Cable,
Loaded Resin Material

Max. Pressure

NEC: 50 PSIG (3.5 bar)
NEC-HY: 58 PSIG (4 bar)

Max. Temperature

NEC: 185 °F (85 °C)
NEC-HY: 194 °F (90 °C)

Media Density

NEC: 0.7...1.15 SG (kg/dm³)
NEC-HY: 0.8...1.10 SG (kg/dm³)

Contact: SPDT Mechanical Switch Changeover,
Connectable as N/O or N/C,
Mercury Free

Switch Capacity: Max. 250 VAC 50/60 Hz,
16A Resistive Load, 6A Inductive Load

Weight

NEC: Approx. 1.8 lb (0.82 kg) with 16' Cable,
Plus Ballast Weight of 0.55 lb (0.25 kg)

NEC-HY: Approx. 1.9 lb (0.85 kg) with 16' Cable,
Plus Ballast Weight of 0.55 lb (0.25 kg)

Switching Angle: Approx. +25° to Activate, -25° to Deactivate
(Angles vary per installation, comparison use only)


Protection Class: IP 68

Order Details


Model	Description
NEC-930	Double Cone Float, 16' PEC Cable
NEC-930N10	Double Cone Float, 30' PEC Cable
NEC-HY930	Hypalon® Coated Double Cone Float, 16' PEC Cable
NEC-HY930N10	Hypalon® Coated Double Cone Float, 30' PEC Cable

*Hypalon is a registered TM of E.I. Dupont de Nemours


**Longer cable lengths are available upon request, consult factory

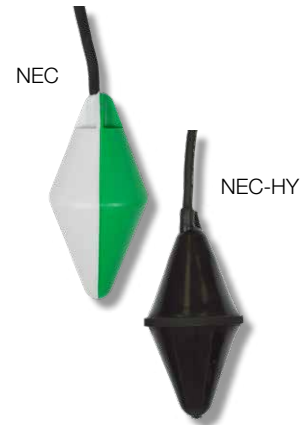

Dimensions

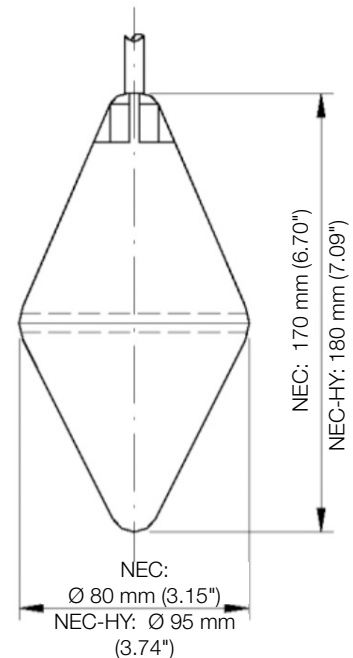

Electrical Connection



No responsibility taken for errors;
subject to change without prior notice.