


Liquid Level Transducer



measuring
•
monitoring
•
analyzing

NML-308

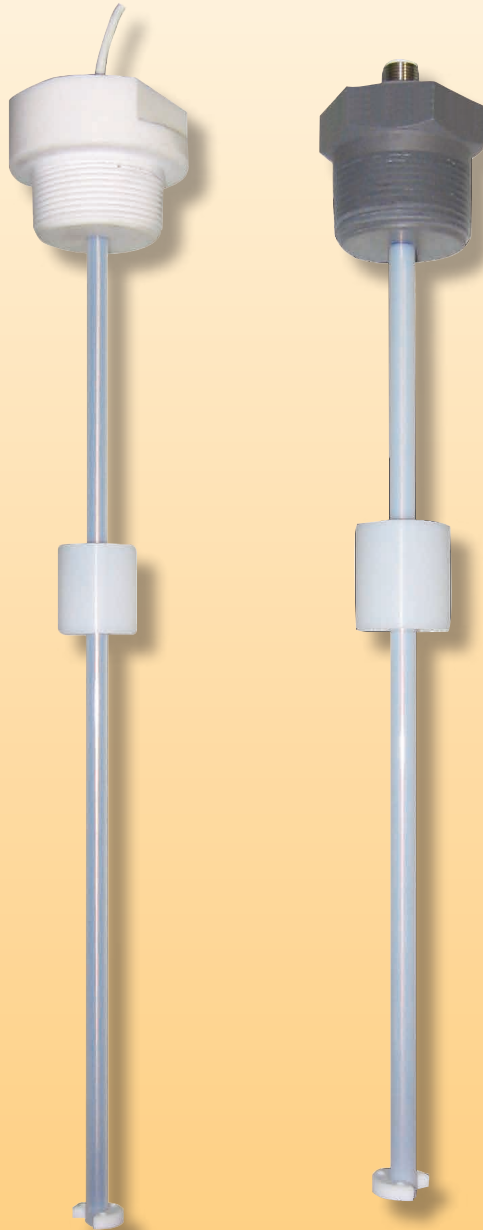

- All Plastic Wetted Parts
- All PTFE/PFA Parts Available
- Compatible with Aggressive Chemicals
- Continuous Level Measurement
- Analog Output via Remote Mounted Transmitter
- Compact Design
- Insensitive to Vapor and Foam
- Liquid Interface Detection



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205




Description

The NML-308 miniature synthetic float level transducers are suitable for level measurement in vessels up to 48" in height. Floats are made from PTFE, tubes are PFA-clad 316 stainless steel, and the fittings are available in polyethylene, polypropylene, PVC or PTFE. The 1-1/4" or 1-1/2" NPT fitting accommodates the diameter of the float and enables easy installation from the top of the vessel, or mounting bracket, without removing the float. Each unit comes standard with a cable or a 4-pin micro-DC plug. Custom cables are available. The transmitted level signal is generated via a DIN rail transmitter mounted remotely.

Specifications

Minimum Length:	6"
Maximum Length:	48"
Resolution:	± 0.25"
Dead Band:	1" bottom, 0.62" top
Wetted Parts	
Stem:	PFA (Standard) or PTFE-Clad 316 SS
Float:	PTFE
Fitting:	1-1/4" or 1-1/2" NPT
Fitting Material:	PE, PP, PVC, or PTFE
Minimum S.G:	0.9
Operating Temp.	
PVC/PE:	-4...140 °F
PP:	-4...190 °F
PTFE:	-4...250 °F
Max. Pressure:	25 PSIG @ 70 °F
Electrical Connection:	Micro-DC Plug, 4-pin or Cable
Protection:	NEMA 4X, IP 66

Dimensions

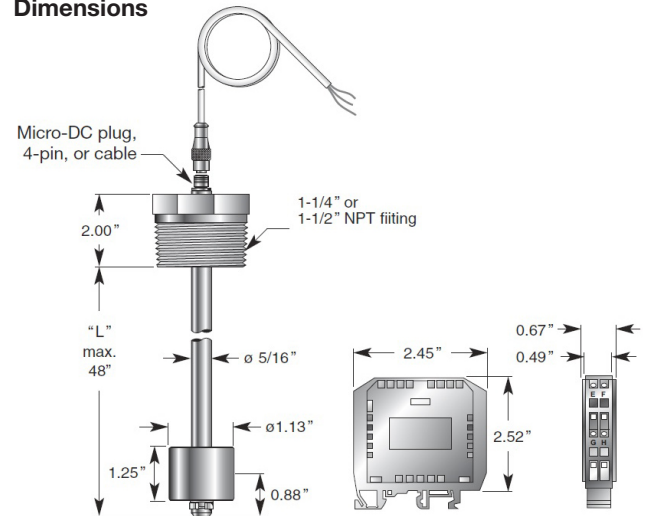

DIN Rail Transmitter

Input Voltage:	12-32 V _{DC} Max.
Output:	4-20 mA, 2-wire 0-5 V _{DC} , 3-wire 0-10 V _{DC} , 3-wire
Sensing Voltage:	5 V _{DC} Max.
Sensing Current:	2.5 mA Max.
Adjustments:	via Potentiometer
Ambient Temperature:	-4...140 °F
Protection:	NEMA 1, IP 40
Housing:	Polycarbonate
Dimensions:	2.52" x 0.67" x 2.45"

Order Details (Example: NML-308 PE N7 A 1 PV L=12")

Model	Fitting Material	Fitting Size	Output	Stem Cladding	Electrical Connection	Options
NML-308..	..PE.. = Polyethylene ..PP.. = Polypropylene ..PV.. = PVC ..PF.. = PTFE	..N7.. = 1-1/4" NPT ..N8.. = 1-1/2" NPT	..A.. = 4-20 mA ..B.. = 0-5 V _{DC} ..C.. = 0-10 V _{DC}	..1.. = PFA (Std) ..2.. = PTFE	..MD = Micro-DC Plug, 4-pin ..PV = PVC Cable, 6 ft ..SL = Silicone Cable, 6 ft ..TF = PTFE-clad Cable, 6 ft ..TA = PTFE-clad with SS Armored Cable, 6 ft	..EC = Extended Cable (Specify Length)
Additional Information						
Please Specify Desired Probe Length when Ordering as L = XX", ie. L= 12"						
Accessories						
807.037 = Mating 4-pin Micro-DC plug with 6 foot cable						