



Sound Steadfast Solutions

Made in the U.S.A.

Invasive Point Level System

Interface Gap Sensor

Description



The Ultrasonic Point Level System 167 Series is an ideal solution for detecting the interface level of two non-homogenous liquids, or the interface level of solids suspended in liquid. The probe is constructed in 316LSS material. The electronic module is captured in a plastic cassette and is mounted in a NEMA 4/ 7 explosion proof housing. An LED indicator on the electronic module offers a visual status of the system. Field selectable Fail safe allows for the relays to be energized on power up or in normal condition to de-energized when liquid is present. A Demand Push button self-test feature on the electronic module assures the user the system is functioning correctly.

Operation

The 1670 Series unit consists of two piezoelectric elements mounted in the housing of the sensor. These elements convert mechanical energy in the form of high frequency sound to electrical energy and vice versa. The elements are mounted parallel and opposite each other across the ½" gap in the probe. A high frequency sent from the electronics to the transmitting element, this vibrates the element at 2 to 4 MHz. Neither Air nor gases will carry sound at this high frequency and will not travel across the sensor gap. When the gap is filled with liquid, the sound will travel across the gap to vibrate the receiving element. The vibration generates an electrical signal that is amplified and read by the detector circuit in the electronics as a "wet" signal. The signal is converted to a relay output or a shift in milliamp output

How to Order		PLS167-							-	-	-	-	-	-	-	-
<i>Input:</i>	24VDC -	0														
	90 to 240VAC -	1														
	9-30VDC -	2														
<i>Output:</i>	10 ADPDT-	--	0													
	Loop Power (4-20mA) -	--	1													
<i>Mounting:</i>	Integral -	--	--	1												
	Remote -	--	--	2												
<i>Cable (remote):</i>	in feet -	--	--	--	01											
<i>Actuation point inches (01"std)</i> -		--	--	--	--	01										
	Gap (6" std) -	--	--	--	--	--	6									
<i>Process connection</i>	3/4"NPT -	--	--	--	--	--	--	03								
	Flange ANSI 150# -	--	--	--	--	--	--	A								
	Flange ANSI 300# -	--	--	--	--	--	--	B								
	Flange Sanitary -	--	--	--	--	--	--	C								
	Flange size 1" -	--	--	--	--	--	--	--	1							
	1.5"-	--	--	--	--	--	--	--	0							
	2"-	--	--	--	--	--	--	--	2							
	Sensor Material -	--	--	--	--	--	--	--								S

<i>Applications</i>	<i>Industries served</i>
<i>High Level / Overflow Alarm</i>	<i>Upstream Oil & Gas</i>
<i>Low Level / Pump Protection</i>	<i>Midstream Oil & Gas</i>
<i>Condensate Pots</i>	<i>Water & Waste- Water</i>
<i>Sump Water / Oil Detection</i>	<i>Chemical & Petrochemical</i>
<i>Lubricant Circulation Equipment</i>	<i>Pulp & Paper</i>
<i>Fill Machine Level Control</i>	<i>Food & Beverage</i>
<i>Pump Leak Detection</i>	<i>Military, Subsea / Surface</i>
	<i>Maritime Shipping</i>
	<i>Inland Barges, ERC Cargo</i>

Sensor material 316LSS is standard, other materials available
Other flange and pressure ratings available
Other remote mounted enclosures available
CONSULT C A BRIGGS COMPANY FOR CUSTOMIZATION

SEP/2019


Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

SENSOR DIMENSIONS

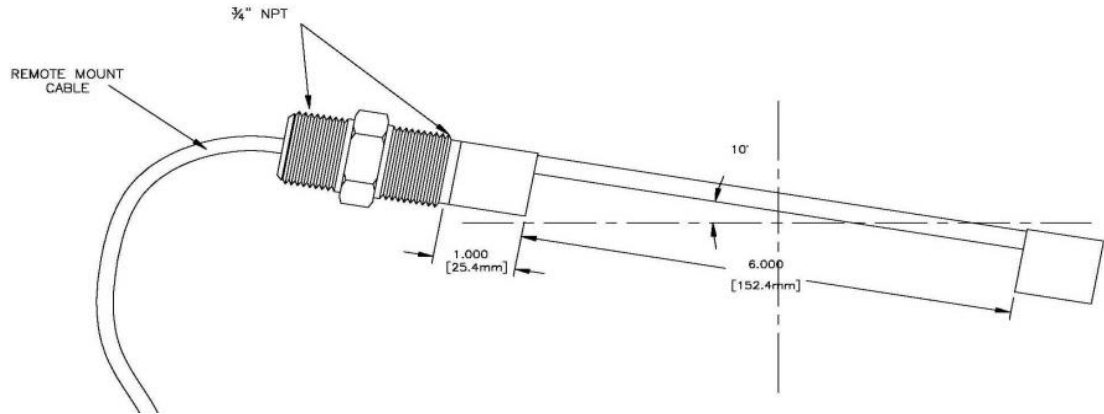

Repeatability: 2mm or better.

Delay (on): 0.5 seconds Standard.

Probe material: 316SS Standard.

Optional material available.

Actuation point: 1.0" Standard.

Up to 99" available.

Sensor Temperature: -20° to 150°C

Sensor Pressure: 1000 PSIG 316LSS.

Liquid viscosity : From 1 to 75,000 cps

Process connection: 3/4" NPT Standard

Flanges mounting available.

Input options: 24VDC, 90 to 240VAC,

Output Options: 10A DPDT

Push Button Demand Self-Test


Field Select Fail-Safe Option

LED Output Indicator

Electronic mounting : Integral or Remote

Enclosure: Nema 4 / 7

ELECTRONIC MODULE ENCLOSURE DIMENSIONS

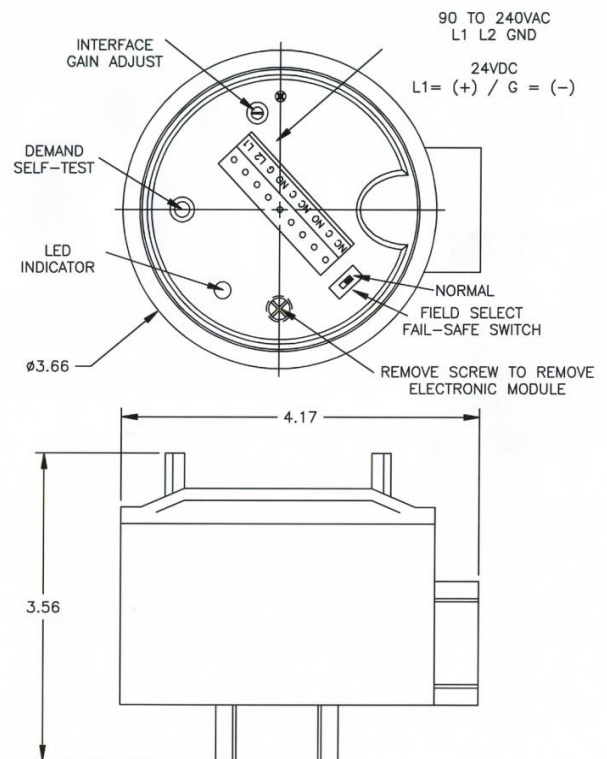

Warranty

Sensaras' level sensors are warranted against inherent defects for a period of two years from the date of shipment.

Performance Guarantee

Should the unit not perform as we claim within 45 days of delivery and was properly installed consistent with our stated requirements and specifications Sensaras will gladly accept a return of the unit for a full credit.

CSA Approval (pending) Explosion Proof
Class I Group CD
Class II Group EFG
Class III Type 4. EP. IP 65.

Disclaimer: Due to technical progress all Data Sheets are subject to change without notice. Sensaras believes all information in this Data Sheet is correct but is not responsible for any inaccuracies. Sensaras is not liable for any damages. It is the customer's responsibility to install, operate and maintain products properly.

Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com