

## MAXVU



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

[Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

The new MAXVU is a cost effective temperature controller which is fast to configure, has improved display visibility and reduces costs by minimising wiring and panel space.


## At-a-Glance

### Save Valuable Time - Set-Up in Under 60 Seconds

MAXVU has been specially designed for ease of use with a basic setup menu accessed from the front keypad.

- Includes 10 most common parameter settings
- Set-up in less than 60 sec for many applications
- Advanced set-up menu can also be accessed when needed

Alternatively fast configuration of multiple instruments can be achieved with the easy-to-use MAXVU PC Software.



### Improve Process Monitoring with a High Visibility Display

The high visibility display provides increased clarity and enables vital process information and alarm messages to be viewed at a glance, even from a distance.

MAXVU's impressive large digits create the largest active display area for any 1/16DIN (48x48mm) controller and is equally impressive on the larger 1/8DIN version (96 x48mm).

MAXVU16



MAXVU8




### Reduce Space Required Behind-the-Panel

The short 67mm depth benefits installers by giving better access and reducing the panel depth required.

This results in MAXVU being easier to wire and quicker to install to save in overall costs.

67mm

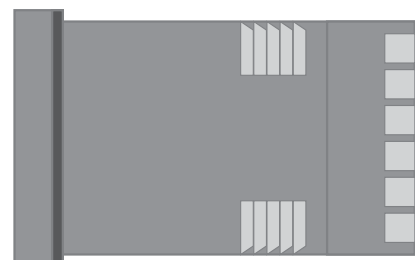

# Key Features

## CONTROL

- MAXVU:**
- PID or ON-OFF control
  - 'Heat' only or 'heat & cool' strategy
  - Selectable indicator mode
  - 2 alarms (absolute, deviation, band, loop)
  - Latching or non-latching alarm outputs
  - 1 or 2 point calibration
  - Ramp/dwell with delay time
  - Reset to defaults
- MAXVU E:**
- Extrusion default settings
  - Non-linear cooling
  - Soft start
- INPUTS**
- Thermocouple: B, C, J, K, L, N, R, S, T,
  - RTD: PT100 2 or 3 wire,
  - Linear ranges: 0/4 to 20mA, 0/1 to 5V, 0/2 to 10V (Not MAXVU E)
- OUTPUTS**
- 2 or 3 outputs; relay or SSR

## INDICATORS

- MAXVU:** Output status  
**MAXVU E:** Heat, cool, alarm

## DISPLAY

- 1/16 DIN: 18mm upper, 10.2mm lower  
 1/8 DIN: 18mm upper, 18mm lower



## COMMS

## PROGRAMMING

- RS485 Modbus RTU
- Integral configuration port

## FACIA & KEYPAD

- Front keys or software programming

## 3 tactile keys

# MAXVU Configuration Software

Controllers can be programmed quickly using the dedicated PC configuration tool via MAXVU's integral configuration port.

- Logical menu driven interface
- Tables with drop down menus
- Graphical setup wizard with informative help panel
- Save configuration files
- Print report of controller settings



## Ordering Code

**Supply Voltage**  
 M 110 to 240V AC  
 L 24V AC / DC

**Version**  
 0 Standard  
 E Extrusion

**Format**  
 16 1/16 DIN, 48 x 48mm  
 08 1/8 DIN, 96 x 48mm

**Output**

	Out 1	Out 2	Out 3
AA0	SSR	SSR	None
AR0	SSR	Relay	None
RR0	Relay	Relay	None
AA R	SSR	SSR	Relay
AR R	SSR	Relay	Relay
RR R	Relay	Relay	Relay

**Communications**  
 0 Not Fitted  
 C RS485 Communications

**Terminal Cover**  
 blank Not Fitted  
 S415 Fitted

**Ordering Code:** MV 16 0 M AA0 0 2 1 U 0

## Flexible for Use in a Range of Applications

MAXVU provides an affordable solution for applications needing essential temperature control.

### Packaging



### Heated Enclosures



### Food and Beverage



### Plastic & Rubber Extrusion



### General Heat Processes



## Contact Us

**WEST**  
Control Solutions

Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

[Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

BR-MV-2-UK-1607